


AX-8M

Audio Master Station for AX Series

FEATURE CALL-OUTS:

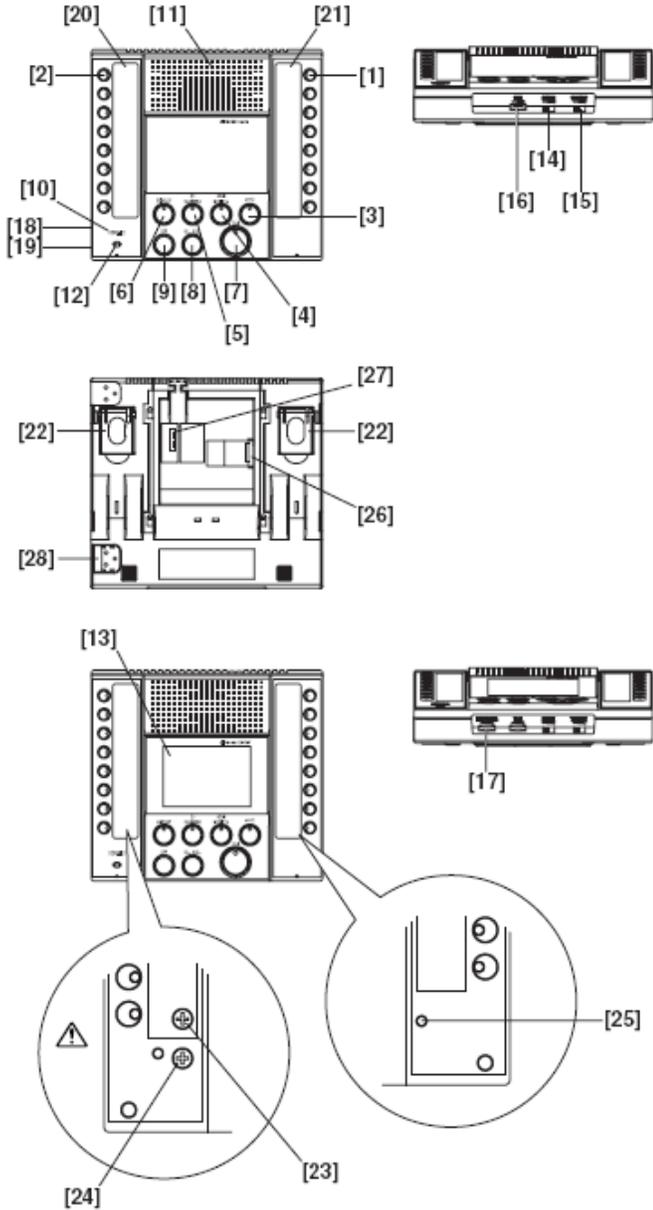

FEATURE CALL-OUT DEFINITIONS:

- [1] Door station selector button w/LED
- [2] Master station selector button w/LED
- [3] Door release button
- [4] Scan monitor button w/LED
- [5] CO transfer button w/LED
- [6] Privacy button w/LED
- [7] TALK button w/LED
- [8] ALL CALL button
- [9] OFF button (standby)
- [10] Occupied LED
- [11] Speaker
- [12] Microphone
- [14] Receive volume control switch (low, med, high)
- [15] Transmit volume control switch (low, med, high)
- [16] Tone volume control
- [18] Headset receiver jack
- [19] Headset microphone jack
- [20] Master station directory card / card cover
- [21] Door station directory card / card cover
- [22] Desktop stand
- [23] Headset receiver volume control
- [24] Headset microphone volume control
- [25] Reset switch
- [26] RJ45 jack for wiring to CEU
- [27] Optional connector input
- [28] Connector for AX-16SW add-on selector

SPECIFICATIONS:

- Power Source: 24V DC Supplied from CEU
- Call Tone: Tremolo ring tone & blinking LED
- Communication: Open voice hands-free (VOX or Push-to-Talk)
- Headset Jack: 3.5mm mic and speaker jacks
- Calling Capacity: Up to 7 additional master stations
Up to 120 door / sub stations
- Mounting: Desk with flip-up stands, or wall mount with provided metal bracket
- Wall mount box: 2-gang electrical box or ring
- Wiring: CAT-5e homerun to CEU
- Wiring Connection: RJ45 jack
- Housing: ABS Resin
- Color: Black
- Operating Temp: 32 – 104° F (0 ~ 40° C)
- Dimensions (HxWxD): 6-7/8" x 7-5/8" x 1-7/8"
(175 x 194 x 48 mm)
- Weight: 1.0 lbs (450g)