CAIPHONE Parts Reference Guide for **GT Series Multi-Tenant Entry Security Intercom**

Easy to customize – mix and match any combination of stations!

Install up to 16 entrance stations, 4 concierge/guard stations, and 500 tenant stations or telephone line adaptors.

Tenant Station Comparison							
Features ► Tenant Stations ▼	7" LCD Screen (wide display)	Door Release (unlocks entrance)	Hands-Free Communication (VOX or PTT)	PTZ Control (170° in wide view)	Picture Memory (records visitors)	Personal Tenant Door Station (replaces the peephole)	Internal Communication (4 stations per apartment)
GT-2C		✓	✓	✓	✓	✓	√ (1 GT-2C + 3 GT-2Hs)
GT-1C7	√	✓	✓	✓			
GT-1M3		✓	✓	√ (zoom only)			
GT-1A		✓	✓				
GT-1D		✓					

Tenant Stations & Telephone Line Adaptor (mix and match up to 500)

Full-Featured** Tenant Master & Sub Master Stations



GT-2C

Video Tenant Master Station

- · Video identification and monitoring with 3-1/2" LCD screen
- Hands-free communication
- Compatible with personal tenant door stations

GT-2C requires

power supply.

a separate



Video Tenant Sub Master Station (requires GT-2C)

- Video identification and monitoring with 3-1/2" LCD screen
- Hands-free communication
- Up to 3 per GT-2C

Only the full-featured tenant stations

support internal communication with 1 GT-2C + 3 GT-2Hs per tenant.

Tenant Stations*



GT-1C7

Video Tenant Station Video identification and monitoring with 7" LCD screen

- Hands-free communication
- Sleek, slim design



GT-1M3

Video Tenant Station

- · Video identification and monitoring with 3-1/2" LCD screen
- Hands-free communication
- Sleek, slim design



GT-1A **Audio Tenant**

Station Hands-free communication



 Handset for privacy

Telephone Line Adaptor



Telephone Line Adaptor (required per tenant)

 Provides ability for a single resident to answer calls and unlock doors using a telephone



Security Guard/ Concierge Station (up to 4)



Security Guard / Concierge Station nown with optional GFW-S desk stand)



GT-MK requires a separate

Personal Tenant Door Stations (1 per GT-2C)



GT-D

Audio Door Station

- Plastic chassis
- Surface mount



*Up to 4 stations per tenant with these

parameters: 1 GT-1C7 + 3 audio stations OR 2 GT-1M3s + 2 audio stations OR 4 audio stations.

JK-DA

Video Door Station

- PTZ camera Surface mount
- Plastic chassis



JK-DV

Video Door Station

- · Zinc die cast cover
- PTZ camera Surface mount



JK-DVF

Video Door Station

- Stainless steel panel
- PTZ camera
- Flush mount (back box included)



JK-DA, JK-DV, and JK-DVF have a wide angle camera, allowing users to view up to 170° of the entry area.

Power Supply, Control Units, and Accessories



PS-2420UL 24V DC, 2A **Power Supply**



Control Unit



GT-VBC Video **Control Unit**



GT-4Z 4-Way Video Distribution Adaptor



GTW-VOA Video Output Adaptor



GT-BCX

Expanded Audio Control Unit (includes mounting rail)





GT-VBX Expanded Video Control Unit (includes mounting rail)



GTW-LC Multi-Relay Control Unit (includes mounting rail)





W-DIN11

DIN Mounting Rail for GT-BC, GT-VBC, GT-4Z, or GTW-VOA



GT-RY External Signalling Relay






Mix and match up to 16 All-In-One Entrance Stations, Modular Entrance Station Kits, or Custom Entrance Stations

All-In-One Entrance Station


Ready-to-Install Single Panel with Digital Scroll Buttons

Modular Entrance Station Kits

Ready-to-Assemble Modular Kits with Digital Scroll Buttons

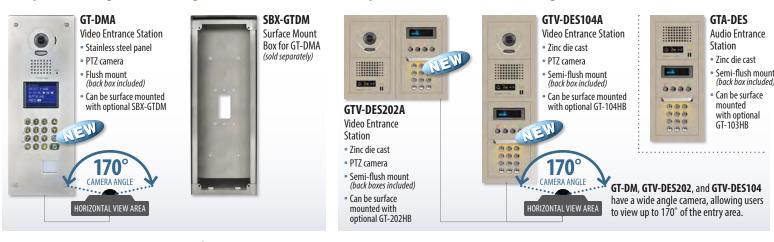

Modular Components for Custom Entrance Stations

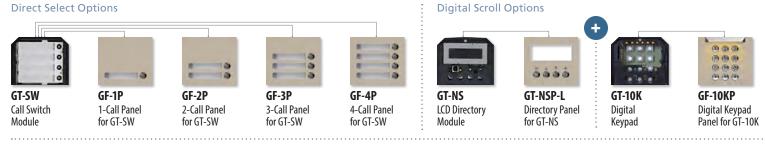

Mix and Match with Required Audio Panel/Module - Compatible with Direct Select and Digital Scroll Options



Mounting Components for Entrance Stations

