

IX-MV7-H

Touchscreen Master Station with Handset for the IX Series



DESCRIPTION

The IX-MV7-H is an IP handset master station with a 7" color touchscreen. It can be wall or desk mounted (desk stand included). It connects to a network using Cat-5e/6 cable and is SIP compliant. Audio and video of active conversations can be captured and stored on a microSD™ card. Each master station has an address book of 500 stations and can monitor a single station or scan monitor several stations with-in the address book. The master station offers line supervision and a scheduled device check of stations in its address book. It has the ability to page all units or groups of units and offers bell scheduling with 50 events per day. The master station has eight speed dial buttons that can be used to call, page, monitor, or control a contact closure. It has a built in camera with privacy shutter. The master station can view a selected intercom's camera as well as an associated ONVIF Profile S camera by using the picture in picture function. It has the ability to release the door that is associated with the station that it is communicating with. Stations can be called by using the directory or by direct dialing the stations number. The master is available in black (IX-MV7-HB) or white (IX-MV7-HW).


FEATURES

- 7" TFT color LCD touchscreen
- Fixed color video camera with privacy shutter
- SIP 2.0 compliant
- 500 station address book
- ONVIF Profile S compliant
- Multi-angled desk stand (30°, 45°, 60°)
- Slot for microSD™ card (not provided by Aiphone)
- 802.3af PoE compliant
- 2 contact outputs, 4 trigger inputs
- 8Ω 0.5W speaker output
- 600Ω audio input

IX-MV7-H

Touchscreen Master Station with Handset for the IX Series

FEATURE CALL-OUT:

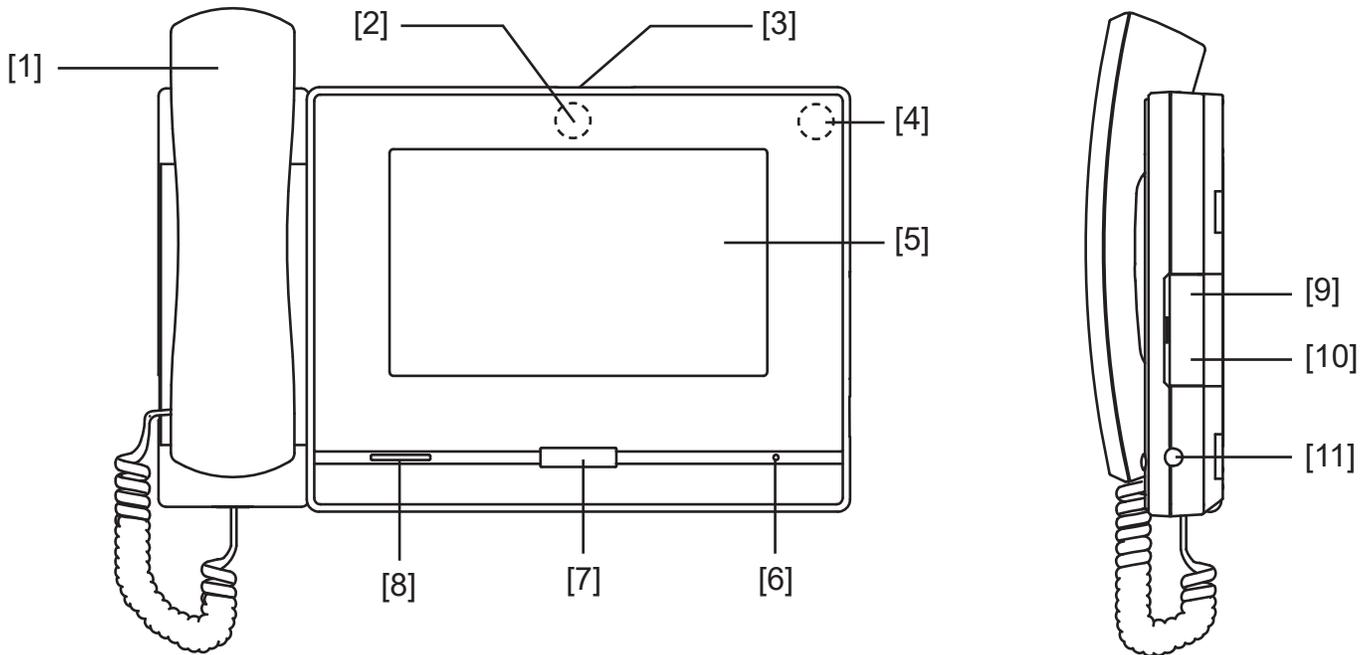

FEATURE CALL-OUT DEFINITIONS

- [1] Handset
- [2] Camera
- [3] Privacy mask cover (on top)
- [4] Status indicator light (orange/blue)
- [5] 7" Touchscreen (LCD)
- [6] Microphone
- [7] Home button
- [8] Speaker
- [9] Reset button (under door)
- [10] Slot for microSD card (under door)
- [11] 3.5mm stereo mini jack

SPECIFICATIONS

Power Source:	PoE (IEEE 802.3af class 0)
Power Draw:	4.32W
Camera:	1/3" CMOS 720p
Min. illumination:	5 Lux
Audio Codec:	G.711 (μ -law, A law), G.722
Video Codec:	H.264/AVC, Motion JPEG
Protocols:	IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS
Port Security:	IEEE 802.1X
UL Listed:	UL 62368-1 cUL 62368-1
Operating Temp:	32° ~ 104°F (0° ~ 40°C)
Dimensions:	8-1/16" H x 11" W x 2-3/16" D