

The Inovonics four zone add-on receiver with relay outputs programs and supervises up to four Inovonics transmitters. This receiver includes Form C relays for each output, allowing connection to any hardwire panel or stand-alone wireless application.

### Product Features

LEDs allow the user to view the current status of all four transmitters


Outputs can be configured in follower, latching, momentary, or toggle modes independently

Case tamper protection, jam detection and internal antennas for a secure wireless implementation


### Product Specifications

Weight:	9.9 oz (280 g)
Power requirement:	11 - 14 VDC; 400 mA
Output specifications:	Form C relay 1A @ 28 VDC, 0.5A @ 30 VAC resistive load; N/O receiver case tamper contact closure, N/C receiver jam output indication
Input specifications:	A low is less than .5 V; a high is greater than 2.5 V
Reset input:	Contact closure, momentary low
Number of points/transmitters:	Four
Number of alarm outputs:	Four Form C relay outputs
Number of fault outputs:	One Form C relay output
Operating environment:	
Temperature:	32° - 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Regulatory compliance:	FCC, Industry Canada, RoHS, AS/NZS 4268:2008, UL 365, UL 636, UL 985, UL 1023, ULC/ORD-C1023-74, UL 1610, UL 1076

## Inputs

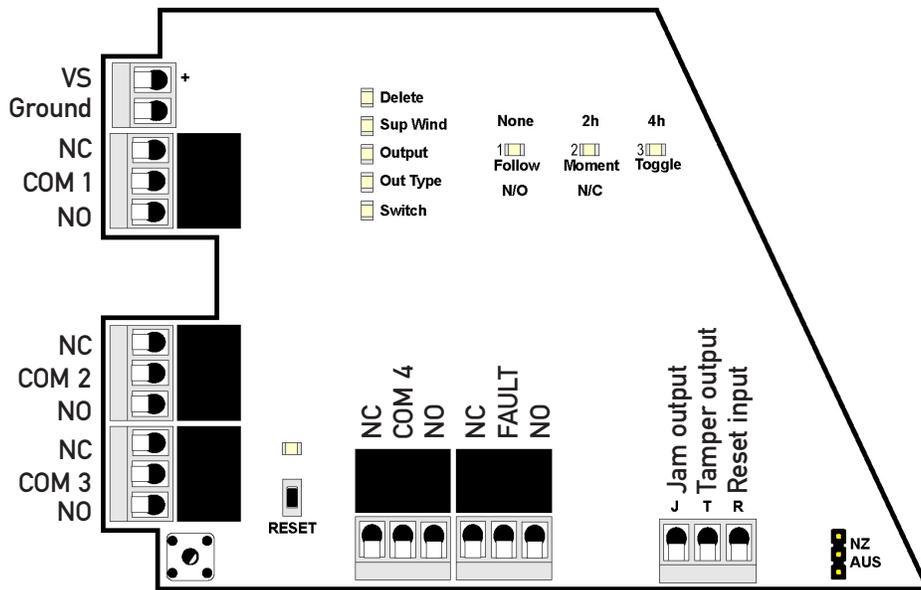

## Dimensions

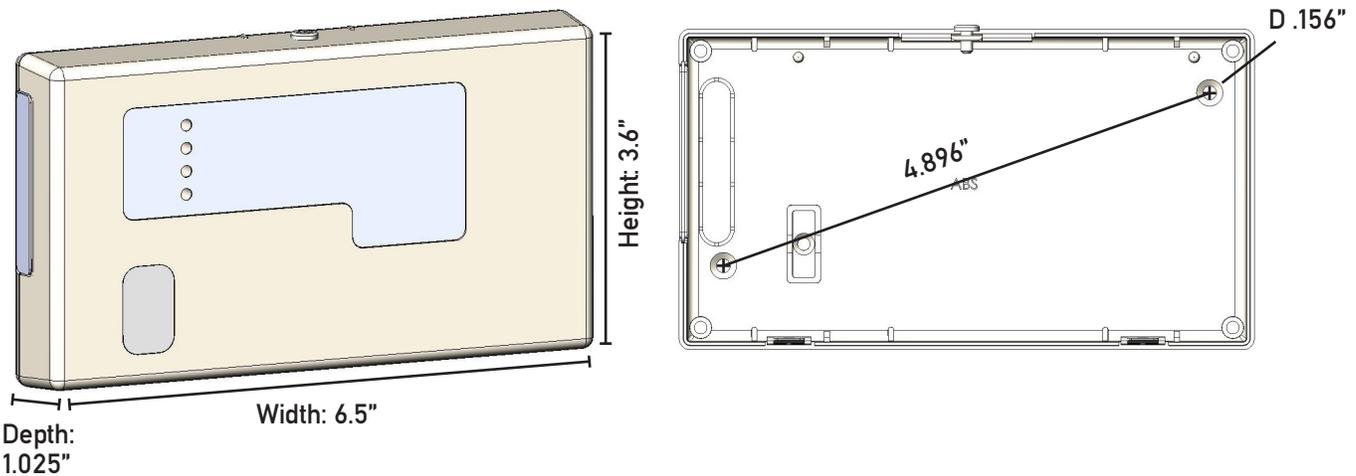

## Reference Materials (available at [www.inovonics.com](http://www.inovonics.com))

EN4204R Four Zone Add-On Receiver with Relay Outputs Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

## Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

