



DESCRIPTION

The IXG-2C7 is an IP video tenant station with a 7" LCD touchscreen for the IXG Series multi-tenant system. Each tenant can have up to 8 IXG-2C7. The IXG-2C7 station can answer calls from an entry station, guard station, or individual door station. Once the call is answered communication is hands-free (VOX) or push-to-talk (PTT). Touching the key button will activate the door release associated with the connected entry station or door station. The IXG-2C7 can selectively communicate with other IXG-2C7's in the same tenant or collectively call associated mobile Apps. The IXG-2C7 can request an elevator to come to its floor. The IXG-2C7 will maintain a history of calls that it has received. The history capacity can be expanded by adding a microSD card.


FEATURES

- PoE compliant
- 7" LCD color touchscreen
- Hands-free audio communication
- microSD card slot for added memory
- Place calls to other stations with-in tenant
- Call concierge/guard
- Call elevator to floor
- Monitor door stations

IXG-2C7

IP Video Tenant Station

FEATURE CALL-OUT

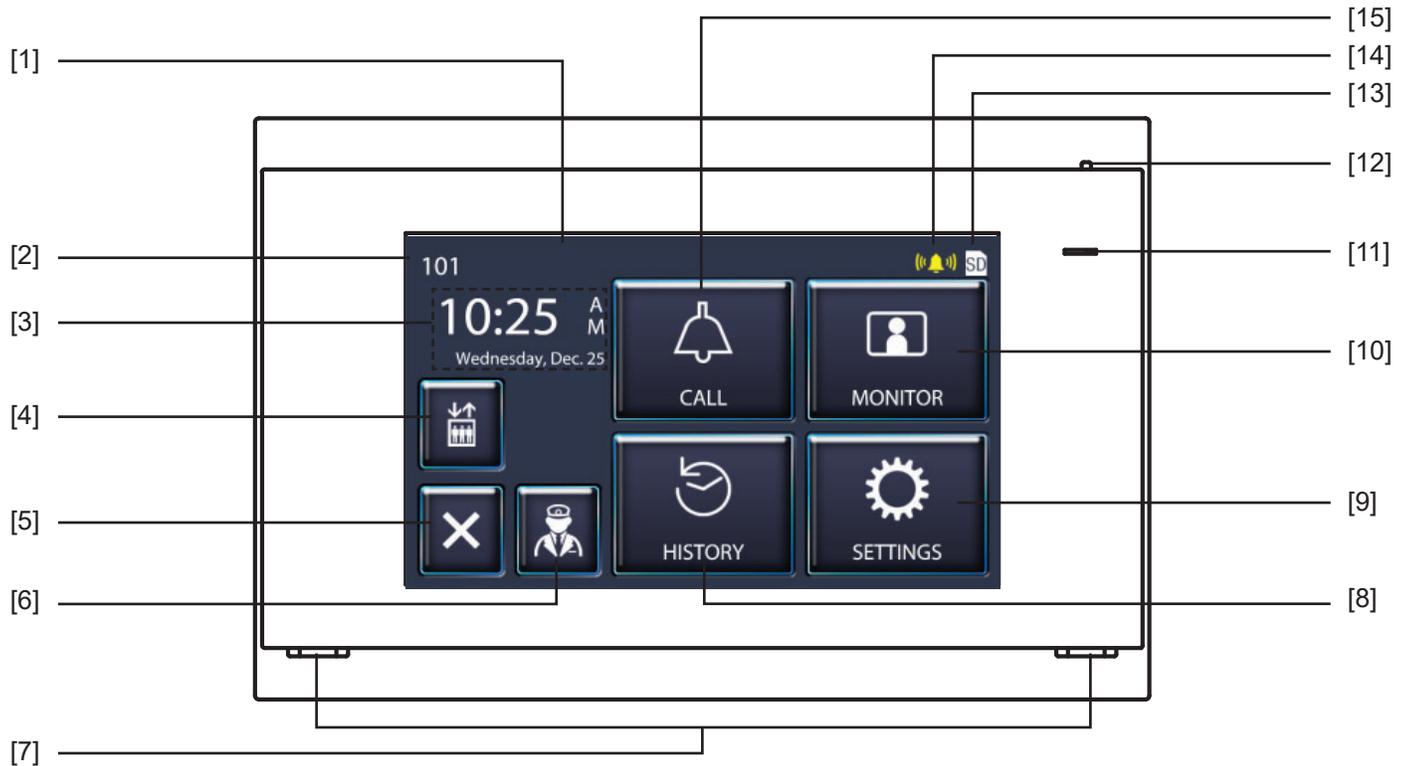

FEATURE CALL-OUT DEFINITIONS

- [1] LCD Touchscreen
- [2] Unit Number
- [3] Date & Time
- [4] Elevator Call Button
- [5] Off Button
- [6] Guard Call Button
- [7] Speaker
- [8] History Button
- [9] Settings Button
- [10] Monitor Button
- [11] Status Indicator (Blue)
- [12] Microphone
- [13] SD Card Inserted Icon
- [14] Incoming Call Icon
- [15] Call Button

SPECIFICATIONS

- | | |
|---------------------|--|
| Power Source: | PoE |
| Consumption: | Standby 1.9W, Max 5.9W |
| Screen: | 7" LCD TFT Touchscreen |
| Monitor resolution: | 800 x 400 |
| Communication: | Full-duplex |
| Audio Codec: | G.711(μ -law, A-law) |
| Video Codec: | H.264, MJPEG |
| Protocol: | IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS |
| Encryption: | TLS 1.0, 1.1, 1.2 |
| Operating Temp: | 32° ~ 104°F (0° ~ 40°C) |
| Dimensions: | 5- ¹³ / ₁₆ " H x 8- ¹⁵ / ₁₆ " W x 1" D |