

Cell Box Prime 4G LTE

AT&T SIM Card
 Included at No Charge
 for easy activation.
 Includes unlimited minutes,
 text & 1 GB of data

RANGE

Access Control

BFT CELLULAR CALL BOX WITH KEYPAD

BFTCELL-PRIME4G: CELLULAR CALL BOX W/ KEYPAD- PEDESTAL MOUNT


BFTCELL-PRIM4GE: CELLULAR CALL BOX W/ KEYPAD-SURFACE VERTICAL MOUNT

BFTCELL-PRI4GEF: CELLULAR ACCESS SYSTEM W/KEYPAD VERTICAL FLUSHMOUNT

BFTCELL-PRI4GFH: CELLULAR ACCESS SYSTEM W/KEYPAD FLUSHMOUNT HORIZONTAL (STAINLESS STEEL RING)



- Open gates from your phone.
- Built in time clock control.
- Remotely program your keypad codes by app.
- Automatic 7-day timer controlled by the app.
- Activity log (see who opened your gates and when).
- Access your property by telephone, caller ID (known number), SMS, or pin code.
- 15V DC power supply adaptor included.
- Built-in illuminated keypad with 200 codes, 20-time zone codes, 30-temporary codes.
- 100 Registered caller id users.
- Get a call from your cellbox anywhere in the world.
- Two year limited warranty.

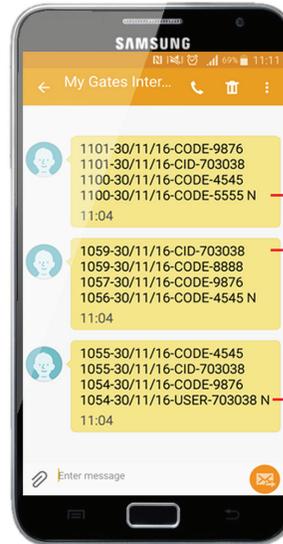


CODE: Keypad code used, with date and time!

CID: Caller ID user with last 6 digits of phone number shown!

USER: Home user, opened their gates at this time and date.



BFT Cellbox Prime

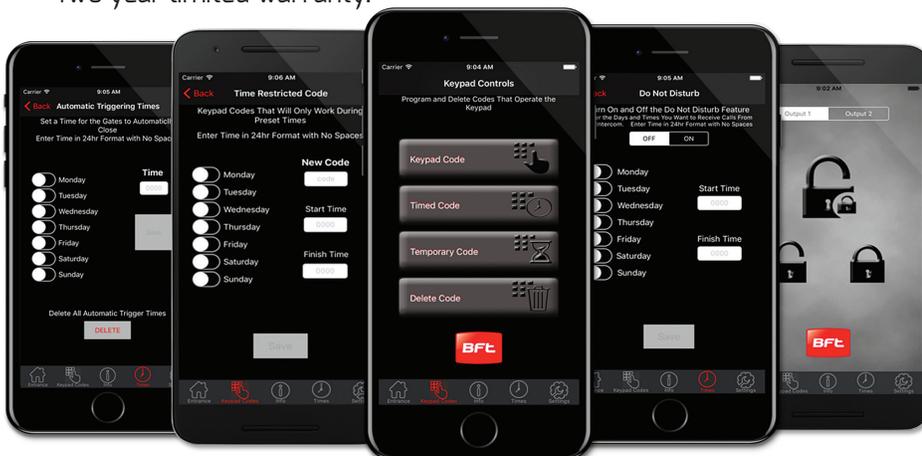

Accessories for Low Signal Areas:

RX489WB- Yagi antenna
 J195SN20- Cable for yagi antenna
 SIGNAL4GKIT: 4G amplified antenna



Be ahead

BFT Americas, Inc.
 1200 SW 35th Avenue
 Boynton Beach, FL 33426


T: 1 561 995 8155
 T: US. 1877 995 8155
 info.bft@bft-usa.com
 www.bftaccess.com
 www.bft-automation.com

Cell Box Prime 4G LTE




PHYSICAL MEASUREMENTS

BFTCELL-PRIME4G

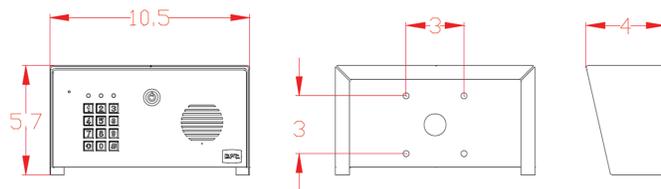

BFTCELL-PRIME4GE

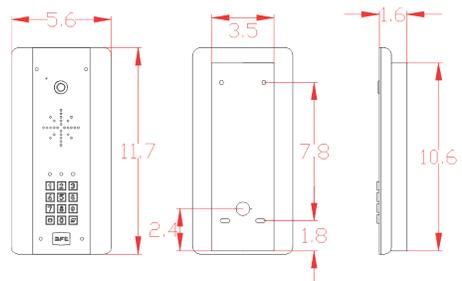

TECHNICAL DATA

BFTCELL-PRIME4G: CELLULAR CALL BOX W/ KEYPAD- PEDESTAL MOUNT

BFTCELL-PRIME4GE: CELLULAR CALL BOX W/ KEYPAD-SURFACE VERTICAL MOUNT

BFTCELL-PRI4GEF: CELLULAR ACCESS SYSTEM W/KEYPAD VERTICAL FLUSHMOUNT

BFTCELL-PRI4GFH: CELLULAR ACCESS SYSTEM W/KEYPAD FLUSHMOUNT HORIZONTAL (STAINLESS STEEL RING)

GENERAL:

Voltage: 15v dc
 Recommended cable @ 25 feet: 14 gauge
 Solar compatible: Yes
 Current on standby: Operating 55mA
 Current: 330mA
 Peak Demand Current: Internal Fuse 2 Amps
 Rating: 500mA quick blow

CELLULAR MODULE:

Relays: 2 relays, max 2 amps, 24v ac/dc load
 Latching: Yes
 Caller ID users: 100
 Programming: SMS & APP
 Network compatibility: AT&T, T-Mobile

KEYPAD CODES:

Standard codes: 200
 Time zoned codes: 20
 Temporary codes: 30



Be ahead

BFT Americas, Inc.
 1200 SW 35th Avenue
 Boynton Beach, FL 33426

T: 1 561 995 8155
 T: US. 1877 995 8155
 info.bft@bft-usa.com
 www.bftaccess.com
 www.bft-automation.com