


OPEN VOICE INTERCOMS
LEM & LEF Series
Access Control Intercom Systems
• Audio or Audio / Video Door Entry •



A variety of Open Voice Intercom Systems for Business and Residential applications, providing a means for communicating between multiple points to enhance security and convenience.


In Businesses (LEM-1DL)

The LEM-1DLS Access Sentry set is an audio door answering and door release system for business use. Identifying a visitor before allowing them access improves the security and adds convenience to any business. Various applications include offices of all sizes, courthouses, hotel / motel door entries, retail and convenience stores, and virtually any type of small secured facility.

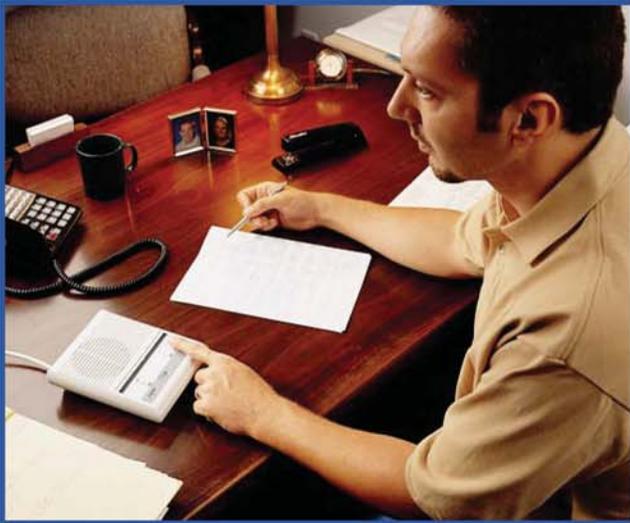

Business & Commercial (LEF)

The LEF system can be designed to meet a wide variety of communication needs, depending on the type of facility and the communication requirements. Any combination of master, sub, and door stations can be intermixed up to the system's capacity. This is an ideal system for Gate / Entry, Repair shops, and many commercial / industrial applications. Where communication and access control is needed at remote locations, the LEF can serve as an electronic security guard, allowing access to authorized people only.

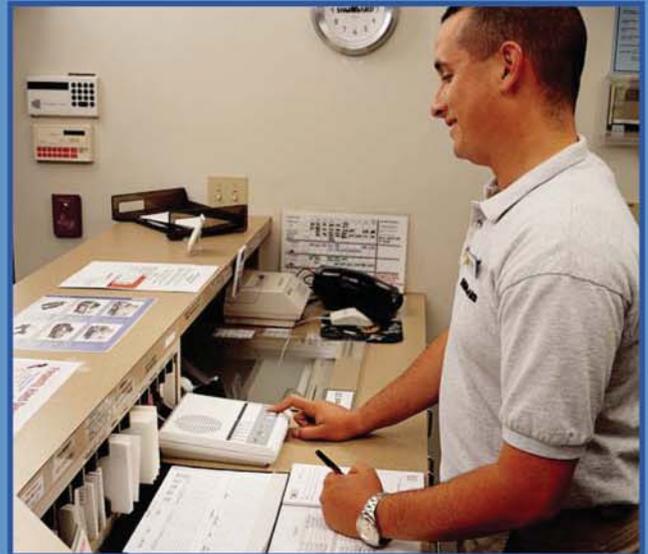

In Clinics (LEM-3)

The LEM system is a compact, simple to use, internal intercom system. A master station with one or up to three remote stations can be used for simple communication between locations or for monitoring remote areas. Various applications include hospitals, clinics, schools, daycare centers, correctional and law enforcement offices, plus many others.



In Homes (LEF-C / MY)

The LEF-C audio system in combination with the optional MY video system provides the ultimate in audio / video communication for the home. The homeowner can easily identify and speak to the person at the door. The camera in the door station can be adjusted, expanding the view of the entry area. Intercom stations located throughout the home provide easy communication between rooms. All of these features provide an extra measure of security and convenience for people in their homes.



LEF-C (Audio / Video)



MK-DGC*
PanTilt Video Door Station,
aluminum panel, 3-gang



MYH-CUB
Video Monitor,
semi-flush mount

LEF-10C
10-Call Master Station with
All Call, semi-flush mount



LEF-5C
5-Call Master Station with
All Call, semi-flush mount



LE-DA*
Door Station, stainless steel
faceplate, flush mount, 2-gang



LEF-3C
3-Call Master Station,
semi-flush mount



LEF-1C
All Call Sub Master Station,
semi-flush mount
requires BG-10C



BG-10C
All Call, Chime and Music Adaptor

* See back page for complete sub and door listing

Intermixable Open Voice System - Semi-flush Mount Design


The Master Sentry system provides simple communication between rooms and outside entry areas. For small to large homes, a system can be designed to meet virtually any communication need.

Features:

- Same features as LEF system, plus
- Semi-flush mount master and sub stations
- LEF-1C sub-master for door answering & All Call
- Every master and sub-master can initiate All Call
- Monitor any room station from a master station
- Door Chime and All Call with BG-10C (+ PS-1225UL)
- Music volume control on masters, LEF-1C & LE-C/CN subs
- Black & white PanTilt video door entry can be included

Models	Capacity	Cable
LEF-1C	(sub-master)	10 (12 w/video)
LEF-3C	4 stations	12 cond.
LEF-5C	6 stations	15 cond. (*1)
LEF-10C	11 stations	20 cond. (*2)

(*1) +5 (K1 ~ K5),
(*2) +10 (K1 ~ K10)
for video and/or door
release control

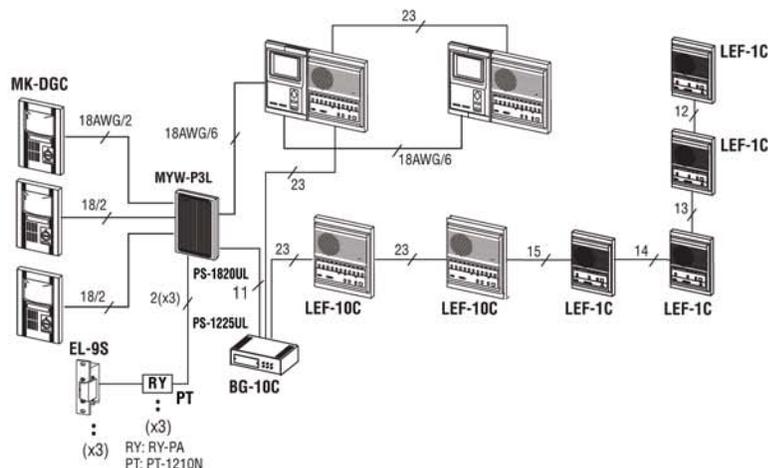

LEF-1C's can answer one door station,
receive calls from any master station,
and make an All Call announcement.

LEM-1DL

DOOR 1 → INSIDE 4



LE-D*
Door Station, plastic cover, surface mount



LEM-1DL
Master Station with door release button



PT-1210N
AC Transformer, 12V AC



EL-9S
Electric Door Strike, 12V AC, 350mA

Boxed Set



LEM-1DLS: LEM-1DL, LE-D & PT-1210N

*See back page for complete sub and door listing

LEM-1, LEM-3

DOOR/SUB 3 → MASTER 2



LEM-1
1-Call Master Station, surface mount



LEM-3
3-Call Master Station, surface mount



LE-A*
Sub Station, surface mount


*See back page for complete sub and door listing

Access Sentry Door Entry System

LEM-1DL is ideal for businesses, providing calling and communication from a secured door to an inside station. Once a visitor's identification is verified, an electric strike can be activated from the inside station.

FEATURES:

- Call tone from door and hands-free communication
- Push-to-talk door answering at inside station
- Door release control (normally open contacts)
- Use any LE-series sub or door station
- Call tone and communication volume controls
- Wall or desk mountable master station
- AC (PT-1210N) or DC powered (PS-1225UL)

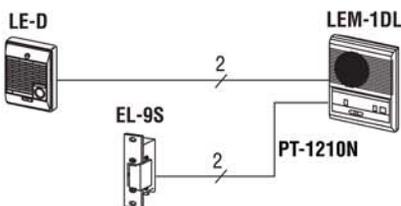


Single Master Open Voice System

LEM-1 and LEM-3 are compact master stations that can answer and communicate with one, or up to three remote stations. Indoor sub stations or door stations can be used. Ideal for monitoring a room or where simple hands-free communication is required.

FEATURES:

- 1- and 3-call master stations
- Subs call with tone (and LED on LEM-3)
- Push-to-talk at inside station to answer sub
- Hands-free communication at sub
- Use any LE-series sub or door station
- Communication volume control
- 2 conductor homerun wiring from subs
- 6V DC powered (SKK-620)

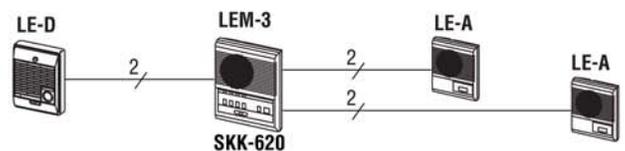

LEF (Audio Only)



LE-DA*
Door Station, stainless steel faceplate, flush mount, 2-gang




EL-9S
Electric Door Strike, 12V AC, 350mA




LE-A3*
3-Call Sub Station, surface mount



LE-AN3*
3-Call Privacy Sub Station, surface mount

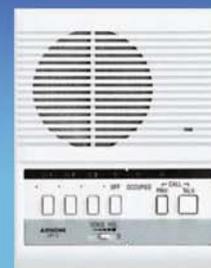

LEF-3
3-Call Master Station, surface mount

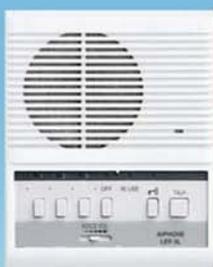

LEF-3L
3-Call Master Station with selective door release, surface mount



LEF-5
5-Call Master Station, surface mount



LEF-10
10-Call Master Station, surface mount



LEF-10S
10-Call Master Station with All Call, surface mount

*See back page for complete sub and door listing

Intermixable Open Voice System - Surface Mount Design

The LEF system can be designed with a variety of master and sub stations to create the communication system needed. With its design flexibility, the LEF can be used for virtually any application.

FEATURES:


- Intermix master stations, subs, and door stations up to maximum capacity
- Selective calling from a master station with hands-free reply
- Call-in from subs and doors activate tone and LED at master(s)
- Selective door release from LEF-5, 10, 10S
- Privacy feature prevents eavesdropping (all masters and "N" model subs)
- Variety of sub station models available
- Communication and call tone volume controls

OPTIONS:

- All Call, Chime, and Music input (w/LEF-10S, BG-10C and PS-1225UL)
- PanTilt black & white video door entry can be added (MK/MY series)

Models	Capacity	Cable
LEF-3	4 stations	9 conductors
LEF-5	6 stations	12 cond. (*1)
LEF-10	11 stations	17 cond. (*2)
LEF-10S	11 stations	20 cond. (*2)

(*1) +5 (K1 ~ K5),
(*2) +10 (K1 ~ K10)
for video and/or door release control

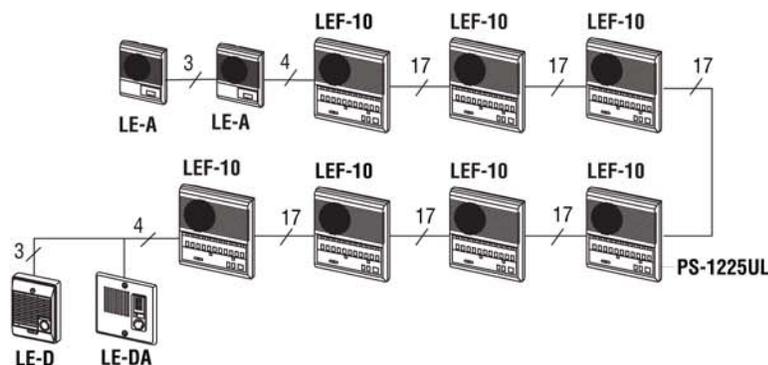

Common Sub Station & Accessories

Interior Sub Stations				Exterior Door Stations (all exterior door stations are weather resistant)								
• Surface Mount •		• Semi-flush Mount •		• One Gang •		• Two Gang •						
LE-A (shown) Sub Station	LE-A3 (shown) 3-Call Sub Station	LE-B (shown) Sub Station	LE-C* (shown) Sub Station with All Call / music volume control	LE-D Door Station, plastic cover, surface mount	LE-SS-1G Door Station, vandal-resistant, stainless steel, flush mount	LE-DA Door Station, stainless steel faceplate, flush mount	LE-SS Door Station, vandal-resistant, stainless steel, flush mount	LE-SSR Door Station, vandal-resistant, stainless steel, red mushroom call button, flush mount	LE-SS-GP Door Station, vandal-resistant, gold plated, flush mount			
LE-AN Privacy Sub Station	LE-AN3 3-Call Privacy Sub Station	LE-BN Privacy Sub Station	LE-CN* Privacy Sub Station with All Call / music volume control									
*requires BG-10C												
PanTilt Video Door Stations (all are weather resistant), Interior Monitors & Camera Adaptors												
• Surface Mount •		• Semi-flush Mount •		• Flush Mount •		• Monitors •		• Adaptors •				
MK-DAC PanTilt Video Door Station, plastic cover, 1-gang	MK-DBC PanTilt Video Door Station, plastic cover, 3-gang	MK-DGC PanTilt Video Door Station, aluminum panel, 3-gang	MK-DGV PanTilt Video Door Station, vandal-resistant, stainless steel faceplate	MYH-CU Video Monitor, surface mount	MYH-CUB Video Monitor, semi-flush mount	MYW-P1L Single PanTilt Door Adaptor	MYW-P3L 3 PanTilt Door Adaptor	MYW-P10L 10-Camera Video Adaptor with selective door release				
Options & Accessories												
HID-SS Accessory Station with Embedded HID [®] Proximity Card Reader	ICP-BR Brass Faceplate for LE-DA	ICP-AB Antique Brass Faceplate for LE-DA	SBX-SS-1G Surface Mount Box for LE-SS-1G	SBX-2G Surface Mount Box for LE-DA, LE-SS and LE-SSR	SBX-GP-2G Surface Mount Box for LE-SS-GP, gold plated	SBX-2BH Horizontal Mount Box for HID-SS and LE-SS or LE-SSR (vertical mount also available - SBX-2BV)	SBX-DGV Surface Mount Box for MK-DGV	MKW-R Surface Mount Box for MK-DBC	KAW-D 30° Angle Box for MK-DAC	KMB-45 45° Mullion Mounting Bracket for MK-DAC	EL-9S Electric Door Strike, 12V AC, 350mA	RY-PA Door Release Relay
							BG-10C All Call, Chime and Muic Adaptor		MYW-BA & MYW-BA-M Long Distance Adaptor between monitors			BA-1 Paging Adaptor

Specifications

System	Power Supply	Output	Wiring	Distance
LEM-1DL	PT-1210N 12-16V DC, 4VA 12-24V DC, 200mA (24V)	100mW, adjustable	2 wires (NP) + 2 for EL-9S (separately jacketed)	To door: 650' (22AWG) 1,600' (18AWG)
LEM-1 LEM-3	SKK-620A 6V DC, 200mA	350mW, adjustable	2 wires (NP), homerun	To door/sub: 650' (22AWG) 1,600' (18AWG)
LEF-3, LEF-5 LEF-10, LEF-10S	PS-1225UL (intercom only) 12V DC, 300mA per LEF station	800mW at 20d (receive) 500mW at 20d (transmit), adjustable	ZI All master system; 5 common + No. of LEF/Subs (6 common with door release) • Single master; 2 wires (NP), homerun (E to - link remains attached) • Intermixed system; 3 wires to LE subs (E to - link removed)	To farthest station: 650' (22AWG) 1,600' (18AWG)
LEF-3C, LEF-5C LEF-10C	PS-1225UL (intercom only) 12V DC, 300mA per LEF-C station			
BG-10C	PS-1225UL (for LEF & BG-10C) 12V DC, 2.5A	————	19 wires max., BG-10C ~ LEF-10C, 3 wires to each LE-D/DA	BG-10C to LEF: 500' (22AWG) 1,200' (18AWG)
MYW-P1L	PS-1820UL 18V DC, 500mA	————	2 wires to door (NP), 6 wires in loop, to monitors, 6 wires to LEF	To door: 330' (18AWG) Between monitors: 245' (18AWG)
MYW-P3L	PS-1820UL 18V DC, 600mA	————	2 wires to door (NP), 6 wires in loop, to monitors, 11 wires, MYW-P3L to BG-10C/LEF	
MYW-P10L	PS-1820UL 18V DC, 600mA	————	2 wires to door (NP), 6 wires in loop, to monitors, 19 wires, MYW-P10L to BG-10C/LEF	

Aiphone Corporation

1700 130th Ave NE
Bellevue, WA 98005
Phone: (800) 692-0200 Fax: (425) 455-0071

www.aiphone.com/lemlef.htm

ISO-14001 Certified



Aiphone Co. Ltd.

ISO 9001:2000 Certified



Aiphone Corp.

Deming Prize



Aiphone Co. Ltd.

92218
LEM/LEF 2/06
Printed in USA

AIPHONE[®]
Leading the Way