


	Dimension	Α	В	С	D	Е	F	G	Н
8' foot	Inch	138.0	188.0	19.0	38.0	96.0	79.7	102.9	12.00
	mm	3505	4775	483	965	2438	2025	2613	305
10' foot	Inch	168.0	176	19.0	38.0	120.0	79.7	127.0	12.00
	mm	4267	4470	483	965	3048	2025	3226	305
12' foot	Inch	198.0	164	19.0	38.0	144.0	79.7	151.0	12.00
	mm	5029	4166	483	965	3658	2025	3835	305
14' foot	Inch	228.0	152	19.0	38.0	168.0	79.7	175.0	12.00
	mm	5791	3861	483	965	4267	2025	4445	305


- 1. The Sentinel is K12 certified by the U.S. Department of State (DOS).
- 2. Black paint with yellow stripes is standard. Custom specified paint colors are available.
- 3. Heaters are available for cold weather applications.
- 4. Hydraulic Power Unit (HPU) and Operator Control Panels are not shown.
- 5. Weather-proof HPU enclosure is standard.
- 6. Traffic signal lights, warning lights, vehicle dector loops, and other accessories are available.
- 7. Construction and installation by others, such as concrete foundation, rebar, roadway surface, conduit, wiring and hydraulic hoses.



TOP (PLAN) VIEW

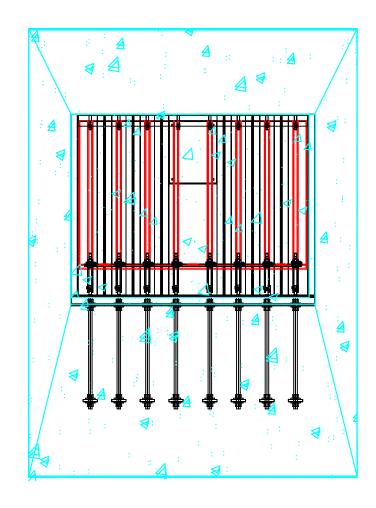


DIRECTION OF VEHICLE ATTACK

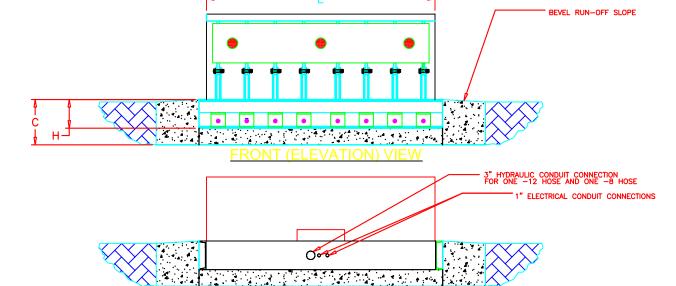

BACK (ELEVATION) VIEW

SIDE (ELEVATION) VIEW

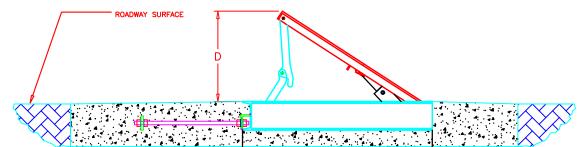

PROPRIETARY INFORMATION

This drawing is the proprietary property of AMERISTAR, Tulsa, OK and must not be duplicated or used in whole or in part for the making of drawings, prints or parts to the detriment of, or harm to, the owner. In accepting this drawing, the recipient agrees to keep the information contained



1555 N. Mingo Tulsa, OK 74116 1-888-333-3422 www.ameristarfence.com

TITLE: SENTINEL 4 VIEW

DATE: SCALE: SHEET: 1/1
DRN BY: CHK BY: xxxxxxxxx REV: a

DRAWING NO: