

NEW!

Adjustable Depth Mounting Brackets

For Class 2 Low Voltage Wiring • Non-Metallic



Depth set for 1/2" wall finish



Adjusts for thicknesses up to 1-1/2"


Arlington's non-metallic adjustable mounting brackets are perfect for low voltage installations when the final wall thickness is unknown.

Set for a 1/2" thick wall finish, they adjust to accommodate a finished wall up to 1-1/2" thick.

- Support tabs deliver extra-secure mounting of bracket to wood or steel studs in new construction
- Depth adjustment screw is always accessible for adjustments to final wall finish thickness...before or after the wall is done
- Easy to install... great-looking installation




LVA2 on metal stud

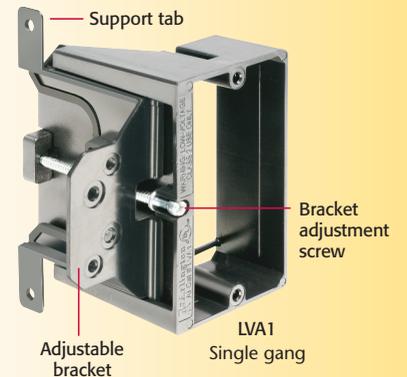

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description | Unit/Std Pkg |
|----------------|---------------------------|-------------------------------|--------------|
| LVA1 | 09750 | Single gang, adjustable depth | 25 |
| LVA2 | 09751 | Two-gang, adjustable depth | 10 |

Set for 1/2" wall finish thickness, adjustable to 1-1/2" thickness

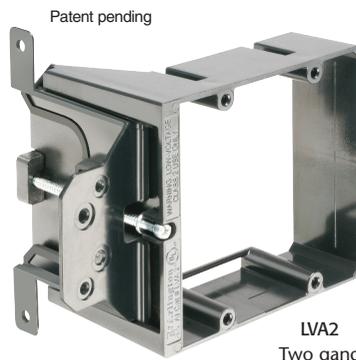

LVA2 Two gang

Patent pending



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com