

Office 100

SKU: 50 Ohm: 472060 **MAP:** \$1,299.99
75 Ohm: 473060

FEATURES

- Ideal amplifier system for small businesses and warehouses
- Covers 8,000 to 25,000 square feet
- Includes LED indicators
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular, and more



Kit Includes

472060 50 Ohm Kit	Office 100 Amplifier	Omni Plus Antenna 314422	Inside Dome Antenna 304412	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
473060 75 Ohm Kit	Office 100 Amplifier	Omni Plus Antenna 314423	Inside Dome Antenna 304419	Lightning Surge Protector 859992	2ft Low-Loss RG11 Cable 951127	60ft Low-Loss RG11 Cable 951160	75ft Low-Loss RG11 Cable 951175

About


weBoost **Office 100** is an ideal amplifier solution for small businesses and warehouses up to 25,000 sq. ft. With Office 100, anyone who walks into the business will enjoy fewer dropped calls, uninterrupted texts, better voice quality, improved hotspot capability, faster internet speeds, better streaming, and more. All components needed for do-it-yourself installation are included. Office 100 is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular, and more. Office 100 comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

Specifications

SKU NUMBER	472060* / 473060*
FREQUENCIES	Band 12/17 700 MHz
	Band 13 700 MHz
	Band 5 850 MHz
	Band 4 1700/2100 MHz
	Band 25/2 1900 MHz
MAX GAIN	72 dB
MAX UPLINK POWER	24 dBm
MAX DOWNLINK POWER	12 dBm
IMPEDANCE	50 Ohm / 75 Ohm
POWER	110-240V AC, 50-60 Hz, 20 W
CONNECTORS	N-Female / F-Female
BOOSTER DIMENSIONS	6 x 6 x 1.8 in
BOOSTER WEIGHT	1.9 lbs

* **⚠️ WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

How It Works

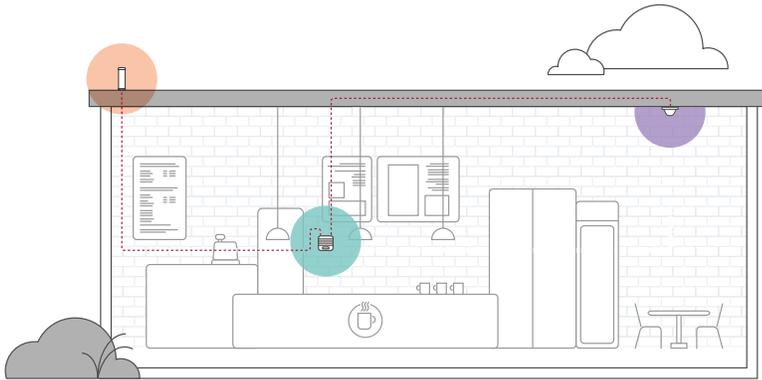

- 1 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 2 Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 3 Inside antenna:** The inside antenna broadcasts these signals for use throughout your business.

Package Dimensions

13 L x 13 W x 15 H



FRONT



SIDE




TOP/BOTTOM



WEIGHT

MASTER CARTON: 13 L x 13 W x 15 H | 16 Lbs. | Qty 1

FOR PARTNER'S USE

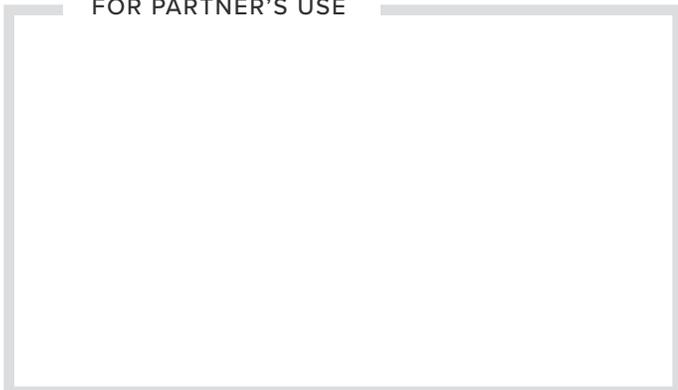

472060 • 473060_Office100_SS_062321

Support



3-Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday



UPC

