


# B299 POPEX Module

[www.boschsecurity.com](http://www.boschsecurity.com)



**BOSCH**

Invented for life

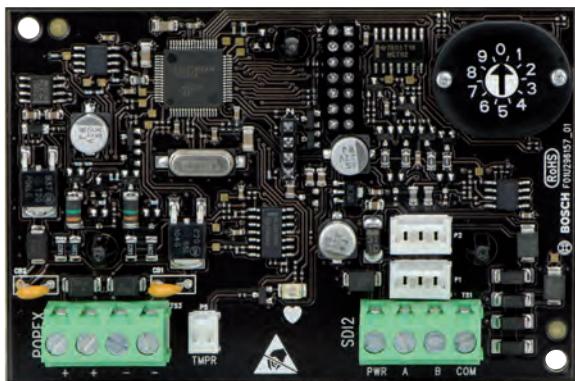

- ▶ Provides point identification for up to 100 connected addressable initiating devices using POPITs
- ▶ Supervises wiring to devices for circuit integrity
- ▶ Expands the number of points in the system
- ▶ Compact size
- ▶ Interconnect wiring connectors for easy installation

The B299 POPEX Module is an SDI2 compatible device. The module communicates to the control panel over the SDI2 bus, and provides support for up to 100 POPIT (Point Of Protection Input Transponder) devices. This occurs over a single expansion loop using two pairs of terminals.

## System overview

Each module installs in the control panel enclosure or in an adjacent approved enclosure. Future system expansion is very economical as the module supports zone expansion through supporting D9127U/T POPIT modules and POPIT'ed detectors. The POPIT modules can be placed anywhere along the two-wire data expansion loop from the module.

## Certifications and approvals

Region	Certification	
USA	ANSI-SIA	CP-01-2010-Control Panel Standard - Features for False Alarm Reduction
	UL	
	UL	UL 1023 - Household Burglar Alarm System Units
	UL	UL 1076 - Proprietary Burglar Alarm Units and Systems

Region	Certification	
	UL	UL 1610 - Central Station Burglar Alarm Units
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	UL	UL 294 - Standard for Access Control Units and Systems
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 636 - Holdup Alarm Units and Systems
	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems
	UL	UL 985 - Household Fire Warning System Units
	CSFM	California Office of The State Fire Marshall
	FCC	Part 15 Class B
Canada	ULC	
	ULC	CAN/ULC S303 - Local Burglar Alarm Units and Systems

Region	Certification	
	ULC	CAN/ULC S304 - Standard for Signal Receiving Center and Premise Burglar Alarm
	ULC	CAN/ULC S545 - Residential Fire Warning System Control Units
	ULC	ULC-ORD C1023 - Household Burglar Alarm System Units
	ULC	ULC-ORD C1076 - Proprietary Burglar Alarm Units and Systems
	IC	ICES-003 - Information Technology Equipment (ITE)

## Installation/configuration notes

### Mounting

Mount the module into the enclosure's 3-hole mounting pattern using the mounting screws and mounting bracket.

### Wiring

Use the control panel SDI2 terminals labeled R, Y, G, B (PWR, A, B, COM) when wiring to the module. Connect the control panel terminals to the module terminals labeled R, Y, G, B (PWR, A, B, COM). You can also use the SDI2 interconnect cable.

### Compatibility

Control panels	B9512G/B9512G-E (6 total B299 modules) B8512G/B8512G-E (1 B299 module)
POPIT devices	D9127U/T POPIT module ZX776Z/ZX794Z PIR motion detector ZX835 TriTech motion detector ZX935Z/ZX938Z PIR motion detector ZX970 TriTech motion detector D278S 12V smoke base D298S 24V smoke base F220-B6PM POPIT smoke (master) F220-B6PS POPIT smoke base

## Parts included

Quantity	Component
1	POPEX module
1	Hardware pack
1	Literature pack
1	Interconnect cable

## Technical specifications

### Properties

Dimensions	2.9 in x 5.0 in x 0.6 in (73.5 mm x 127 mm x 15.25 mm)
Weight	11.2 oz (0.30 kg)

## Environmental considerations

Relative humidity	5% to 93% at +32°C (+90°F)
Temperature (operating)	0°C to +49°C (+32°F to +120°F)

## Power requirements

Current	Standby: 35 mA + total device current Alarm: 35 mA + total device current
Voltage (input)	12 VDC

## Wiring

Terminal wire size	12 AWG to 22 AWG (2.0 mm to 0.65 mm)
SDI2 wiring	Maximum distance – Wire size (unshielded wire only): 200 ft (60 m) – 22 AWG (0.65 mm), 500 ft (152 m) – 18 AWG (1.02 mm)
POPIT loop wiring	Maximum wire length: 1800 ft (548 m) – 22 AWG (0.65 mm), 4497 ft (2682 m) – 18 AWG (1.02 mm)

## Ordering information

### B299 POPEX Module

Provides system expansion support for up to 100 POPIT devices

Order number **B299**

**Represented by:**

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
[emea.securitysystems@bosch.com](mailto:emea.securitysystems@bosch.com)  
[emea.boschsecurity.com](http://emea.boschsecurity.com)

**Germany:**

Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
[onlinehelp@us.bosch.com](mailto:onlinehelp@us.bosch.com)  
[www.boschsecurity.us](http://www.boschsecurity.us)

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
[apr.securitysystems@bosch.com](mailto:apr.securitysystems@bosch.com)  
[www.boschsecurity.asia](http://www.boschsecurity.asia)