

RADION PIR and PIR C

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Two models available. PIR with 12 m x 12 m (40 ft x 40 ft) coverage, PIR C with 12 m x 1.5 m (40 ft x 5 ft) coverage pattern
- ▶ Flexible Mounting Height
- ▶ Pet Immunity up to 13kg (30 lbs)
- ▶ Operational up to 5 years with one user replaceable CR123A battery
- ▶ Supervised for low-battery, cover-tamper, and removal from mounting surface tamper conditions.

RADION wireless from Bosch provides the range, scalability and exceptional battery life required to ensure reliable performance and superior quality. Advanced diagnostics and multiple device enrollment options make installation and maintenance simple and cost effective. With a complete line of peripherals, RADION provides the flexibility for virtually any application requirement.

System overview

RADION PIR and RADION PIR C are high performance, Passive infrared (PIR) based motion sensors that use advanced signal processing to provide superior catch performance and unsurpassed false alarm immunity.

Functions

PIR Signal Processing

Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration, and polarity of signals to make an alarm decision. The detectors tolerate extreme levels of heat and light from heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. There are three sensitivity settings.

Test Features

Externally visible, LED indicates alarm each technology independently.

Pet Immunity

The detector is able to distinguish between signals caused by humans and signals caused by pets such as a dog up to 13 kg (30 lb) or two dogs at 27 kg (60 lb) or up to ten cats. This provides immunity to false alarms while maintaining proper catch performance of human targets.

Draft and Insect Immunity

The sealed optical chamber provides immunity to drafts and insects.

Temperature Compensation

The sensor adjusts its sensitivity to maintain consistent catch performance at critical temperatures.

Battery Life Extension feature (PIR and TriTech)

In the normal operating mode, an alarm can be transmitted only after three (3) minutes have passed since the previous alarm restoral. This 3 minute lockout time reduces unnecessary RF transmissions in high traffic areas, thereby extending battery life.

Certifications and approvals

| Region | Certificate | |
|-----------|-----------------------------------------------------|---------------------------------------------------------------------|
| US | UL 639 – Intrusion Detection Systems FCC Part 15 | |
| Region | Certification | |
| Australia | RCM | [RFPR-C12] |
| Europe | CE | EMC, LVD, R&TTE [PIR and PIR C] |
| | EN50131 | EN-ST-000161 RADION PIR/ RFPR-12/C12 |
| Belgium | INCERT | B-509-0070 RADION RFPR-12, RFPR-C12 |
| USA | UL | 20121217-BP1448 [RPDL-11-A, RFPR-12-A, RFPR-C12-A] |
| | FCC | Part 15 Security/Remote Control Transmitter 433.42 MHZ [433.42 MHZ] |
| Canada | IC | 1249A-RWSSFT [-A model numbers] |
| China | CCC | 2013031901000079 [RFPR-12-CHI, RFPR-C12-CHI] |
| Brazil | ANATEL | 2618-13-1855 |

Installation/configuration notes

Mounting Considerations


Surface or corner mount the PIR at a height between 2.1 m (7.0 ft) and 2.7 m (9.0 ft) high when installing the PIR, and 2.1 m (7.0 ft) and 2.6 m (8.5 ft) high when installing the PIR-C. When installing the PIR, the plastics are specifically designed to allow wall tamper protection in a corner mount installation. The detector can be mounted:

- On a flat wall (surface, semi-flush), with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket.
- In a corner (the junction of two perpendicular walls).
- On the ceiling with the optional B338 Ceiling-mount Bracket.


Additional considerations include:

- Temporarily mount the detector using double-sided tape, and test it for both detector coverage and RF range from the desired location before mounting it permanently.
- Mount the detector where an intruder will most likely cross through the coverage pattern.
- Do not mount in areas with large metallic surfaces such as heating ducts or electrical wiring which may inhibit the sensor’s RF signals from reaching the control panel receiver.
- Do not mount the detector outdoors or where direct sunlight can reach it.
- In pet immune applications, do not mount where pets can climb into the field of view of the upper zones, which are not immune to pets.

Coverage pattern for RADION PIR

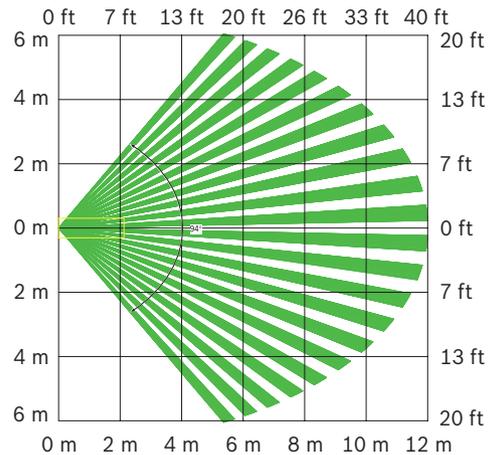


Top View Broad: 12 m x 12 m (40 ft x 40 ft)

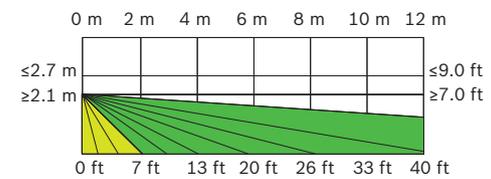


Side View Broad: 12 m x 12 m (40 ft x 40 ft)

Coverage pattern for RADION PIR C (curtain)

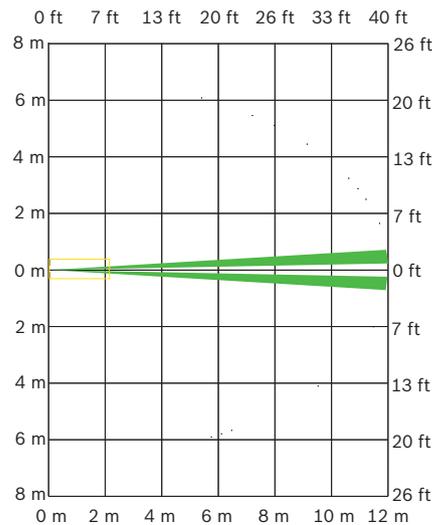

Top View Broad: 12 m x 1.5 m (40 ft x 5 ft)

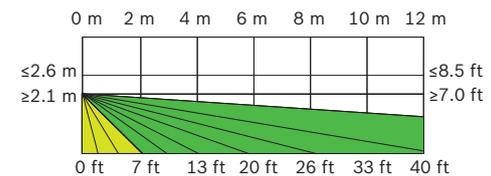

side View Broad: 12 m x 1.5 m (40 ft x 5 ft)

Parts included

| Quantity | Component |
|----------|--------------------------|
| 1 | Detector |
| 1 | Lithium battery (CR123A) |
| 1 | Hardware pack |
| 1 | Installation guide |

Technical specifications

Properties

| | |
|-------------|------------------------------------------------------|
| Dimensions: | 111 mm x 60 mm x 43 mm (4.4 in x 2.4 in x 1.7 in) |
|-------------|------------------------------------------------------|

Power

| | |
|----------------|-----------------------------------|
| Power/Voltage: | One CR123A Lithium battery, 3 VDC |
| Battery life: | Up to 5 years |

Environmental Considerations

| | |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature: | Functional range: -10°C to +49° (+14°F to +120°F) UL only: 0°C to +49°C (+32°F to +120°F) EN 50130-5 Class II only: -10°C to 40°C (+14°F to +104°F) |
| Environment | Complies with EN50130-5 Class II |
| Relative Humidity: | Up to 93% non-condensing |
| Cover and Wall Tamper Switch: | Transmits a tamper switch signal when the detector is removed from its base, or pulled away from the wall. |
| Frequency: | 433.42 MHz |
| Use: | Intended for indoor use. |

Compatibility

| | |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Receivers: | B810 wireless receiver (compatible with RFPR-12-A and RFPR-C12-A only) RFRC-OPT wireless receiver (compatible with RFPR-12, and RFPR-C12 only) RFRC-OPT-CHI wireless receiver (compatible with RFPR-12-CHI, and RFPR-C12-CHI only) |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Ordering information

RFPR-12-A (433.42 MHz)

For use in North and South America.
Order number **RFPR-12-A**

RFPR-12 (433.42 MHz)

For use in Europe, Africa, and Australia.
Order number **RFPR-12**

RFPR-12-CHI (433.42 MHz)

For use in China only.
Order number **RFPR-12-CHI**

RFPR-C12-A (433.42 MHz)

For use in North and South America.
Order number **RFPR-C12-A**

RFPR-C12 (433.42 MHz)

For use in Europe, Africa, and Australia.
Order number **RFPR-C12**

RFPR-C12-CHI (433.42 MHz)

For use in China only.
Order number **RFPR-C12-CHI**

Accessories

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.
Order number **B328**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.
Order number **B338**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.
Order number **B335-3**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia