

# EN1265 360 PIR Motion Sensor-Transmitter (Ceiling-mount Applications)

[www.boschsecurity.com](http://www.boschsecurity.com)



**BOSCH**  
Invented for life



- ▶ 360° by 20 m (65.6 ft) coverage
- ▶ Automatic supervision of radio link
- ▶ Low power consumption
- ▶ Highly sensitive to moving infrared radiation
- ▶ Immunity to Radio Frequency Interference (RFI), vibration, static, lightning, and ambient temperature changes

The EN1265 PIR Motion Sensor-Transmitter is appropriate for ceiling-mount applications and large open spaces. It detects intruders using a pyro sensor element. Advanced signal processing recognizes human signature size and movement, reducing false alarms. The sensor is equipped with a special hard lens that provides large coverage patterns even at low height. It is immune to sunlight, halogen light, and fluorescent light. The enclosure is resistant to attack from intruders.

## System overview

### Powered by Inovonics

The Inovonics EchoStream platform, powered by Inovonics wireless mesh network technology, ensures superior range, reliability, and scalability for commercial applications. Using a wide range of transmitters and repeaters, this proven technology provides flexibility and performance to meet the most stringent requirements. This exclusive protocol is available only on Inovonics EchoStream products.

### Wireless 900 MHz Band

The Inovonics EchoStream platform sends redundant information on several multi-frequency channels within the FCC Part 15 900 MHz band, providing superior range and reliability. In comparison, systems that use a single frequency technology can only send information on one narrow band channel. Any interference within the band can cause missed signals. With wireless registration, it is easy to add this technology to any application.

## Functions

### Battery Sleep Time

Designed specifically for wireless applications, this PIR has a 180 sec fixed or variable sleep time. When the variable sleep time is chosen, it has the intelligence to remain in sleep mode beyond 180 sec during high-traffic periods to provide extended battery life.

### Ceiling Mount Design

Ideal for applications where 360° PIR coverage is preferred.

**Supervision**

The cover tamper and battery activity are supervised. Monitoring helps ensure reliable operation.

**Cover Tamper**

The cover tamper switch notifies the system when an intruder attempts to remove the sensor cover.

**Certifications and approvals**

Inovonics Wireless Corporation holds the following approvals:

FCC      Conforms to FCC Part 15 regulations

**Installation/configuration notes****Compatibility Information**

The EN1265 PIR Motion Sensor-Transmitter is compatible with the following products:

**Receivers**


EN4016SK	Survey Receiver
EN4200	Serial Receiver
EN4204R	LED Receiver

**Repeater**


EN5040-T	High-power Repeater
----------	---------------------

**Mounting Height and Coverage Patterns**

Mount the sensor-transmitter on ceilings no higher than 3.4 m (12 ft) with the standard lens. The coverage patterns for the standard lens are as follows:

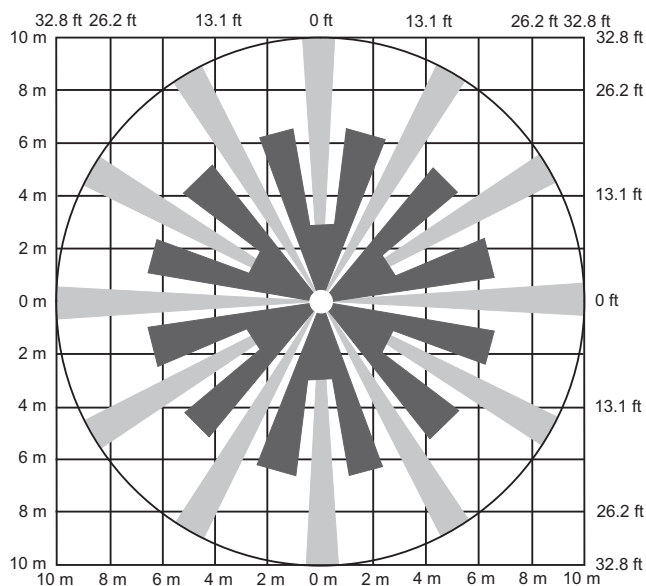**EN1265 Standard Coverage**

Top View: 20 m (65.6 ft) x 360°

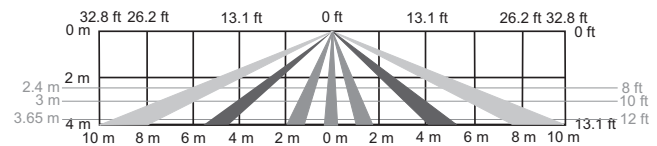

Side View: 4 m (13.1 ft) x 20 m (65.6 ft)

**Parts included**

Quantity	Component
1	Sensor-transmitter with cover tamper
1	3.0 V lithium battery

**Notice**

The EN1265 can accommodate two batteries for extra battery life, but only one battery is required for operation.

**Technical specifications****Electrical**

Power:	3.0 V, 2.2 Ah
Battery Replacement:	Duracell DL123A, Panasonic CR123A, or approved equivalent. Not all brands are equivalent. Use the brands specified.
Battery Life (Average):	4 years. Typical battery life shown is for supervised operation using recommended check-in times. The battery life of a PIR sensor is highly dependent on traffic in its coverage area.
Sleep Time:	Fixed or variable - has a standard fixed sleep time of 180 sec; variable sleep time allows remaining in sleep mode longer to extend battery life in high-traffic environments.

**Environmental**

Relative Humidity:	10% to 90%, non-condensing
Temperature (operating):	0°C to +49°C (+32°F to +120°F)

**Mechanical**

Dimensions:	13.1 cm x 5.7 cm (5.2 in. x 2.5 in.)
Weight:	185 g (6.52 oz)

**Transmission Characteristics**

Frequency:	902 MHz to 928 MHz
------------	--------------------

**Trademarks**

Trademark names are used throughout this document. In most cases, these designations are claimed as trademarks or registered trademarks in one or more countries by their respective owners. Rather than placing a trademark symbol in every occurrence of a

trademark name, Bosch Security Systems, Inc. uses the names only in an editorial fashion and to the benefit of the trademark owner with no intention of infringing the trademark.

Duracell is a registered trademark of the Gillette Company, USA, in the United States and/or other countries.

Inovonics is a trademark of Inovonics Wireless Corporation.

Panasonic is a registered trademark of Matsushita Electric Industrial Co., Ltd.

#### Ordering information

##### **EN1265 360 PIR Motion Sensor-Transmitter (Ceiling-mount Applications)**

Provides 360° by 20 m (65.6 ft) coverage for large open spaces. Includes battery and attack-resistant cover.

Order number **EN1265**

#### Represented by:

##### **Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### **Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### **Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### **China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### **America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com