

# IP Outdoor Station



- 1.3 MP Wide Angle Pivoting Camera with Night Vision
- Built-in Microphone with Two-way Talk
- Provides an Audible Alarm if Removed from the Wall
- Connect Outdoor Stations to an NVR for Recording Call Sessions from the Indoor Monitor and for 24-hour Local Recording
- Easily Leave Audio and Video Messages
- View and Talk with Visitors and Remotely Unlock Doors Using the iDMSS/gDMSS App
- Stainless Steel Panel can be Surface- or Flush-mounted
- IP54 Ingress Protection and IK07 Vandal Resistance

## System Overview

The DHI-VTO2000A-S enables tenants to view and talk with visitors and remotely unlock doors all from an intuitive mobile app and an interior color indoor monitor. Each IP outdoor station includes a 1.3 MP wide angle camera with manual rear pivot, two-way talk and enables remote functions such as snapshot when ringing and the ability to record video and audio messages to a VTH series monitor.

## Technical Specification

### System

|                  |                          |
|------------------|--------------------------|
| Main Processor   | Embedded Micro Processor |
| Operating System | Embedded Linux           |

### Operation

|           |                                 |
|-----------|---------------------------------|
| Input     | Single Mechanical Button        |
| Door Lock | Status Check Support (optional) |

### Video

|                   |                                   |
|-------------------|-----------------------------------|
| Video Compression | H.264                             |
| Image Sensor      | 1/3-in. 1.3 MP CMOS Sensor        |
| Lens              | 2.8 mm                            |
| Angle of View     | Horizontal: 90°<br>Vertical: 120° |
| Day/Night         | ICR                               |



## Interface

|                   |  |
|-------------------|--|
| Audio             | Input: Omnidirectional Microphone<br>Output: Built-in Speaker<br>Two-way Talk        |
| Audio Compression | G.711  |
| Door Control      | One (1) Relay Out for Main Lock  |
| Alarm Input       | Two (2) Channels:<br>• One (1) Channel, Unlock Button<br>• One (1) Channel, Feedback |
| RS485             | One (1) Port   |
| Tamper Switch     | One (1)  |

## Network

|                  |                            |
|------------------|----------------------------|
| Ethernet         | 10/100 Mbps, Self-adaptive |
| Network Protocol | TCP/IP                     |

## Certifications

|                                     |  |
|-------------------------------------|--|
| Electromagnetic Compatibility (EMC) | FCC CFR 47 Part 15 subpart B<br>ANSI C63.4 - 2009<br>EN 55022:2010, EN 55024:2010, EN 50130-4:2011,<br>EN 61000-6-3:2007, EN 61000-3-2:2006+A1:2009<br>EN 61000-3-3:2008, IEC 61000-4-2:2008,<br>IEC 61000-4-3:2010, IEC 61000-4-4:2012,<br>IEC 61000-4-5:2005, IEC 61000-4-6:2008,<br>IEC 61000-4-8:2009, IEC 61000-4-11:2004 |
|-------------------------------------|--|

## Electrical

|                   |   |
|-------------------|---|
| Power             | 12 VDC<br>Can receive power from DHI-VTNS10160A, or<br>Use a separate 12 VDC power supply |
| Power Consumption | Standby: ≤ 1 W<br>Operation: ≤ 10 W   |

Environmental

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | -40° C to +60° C (-40° F to +140° F) |
| Operating Humidity    | 10% to 90%, Relative                 |
| Ingress Protection    | IP54                                 |
| Vandal Resistance     | IK07                                 |

Construction

|              |  |
|--------------|--|
| Material     | Stainless Steel  |
| Dimensions   | 129.0 mm x 32.17 mm x 140.0 mm<br>(5.08 in. x 1.27 in. x 5.51 in.) |
| Net Weight   | 0.80 kg (1.76 lb)  |
| Installation | Surface- or Flush-mount  |

Ordering Information

| Type                  | Part Number            | Description   |
|-----------------------|------------------------|---|
| Intercom              | DHI-VTO2000A-S         | IP Outdoor Station  |
| Accessories, optional | DHI-VTH1550CH-S        | Color Indoor Monitor, 7-in. Display                         |
|                       | DHI-VTNS1060A          | Network Power Supply  |
|                       | ADS-110DL-19-1 240072E | 24 VDC, 3 A Power Adapter for use with DHI-VTNS1060A        |
|                       | ADS-12AM-12 12012EPCU  | 12 VDC, 1 A Power Adapter for use with DHI-VTO2000A-S       |
|                       | VT0B107                | Flush-mount Box, plastic                                    |
|                       | VT0B108                | Surface-mount Box, metal                                    |
|                       | iDMSS/gDMSS App        | Available from the Apple App Store or the Google Play Store |

Accessories



DHI-VTH1550CH-S  
7-in. Color Indoor Monitor



DHI-VTNS1060A  
Network Power Supply



ADS-110DL-19-1 240072E  
24 VDC, 3 A Power Adapter  
for use with DHI-VTNS1060A



ADS-12AM-12 12012EPCU  
12 VDC, 1 A Power Adapter  
for use with DHI-VTO2000A-S



VT0B107  
Flush-mount Box




VT0B108  
Surface-mount Box



iDMSS/gDMSS  
Mobile Application

Dimensions (mm/in.)

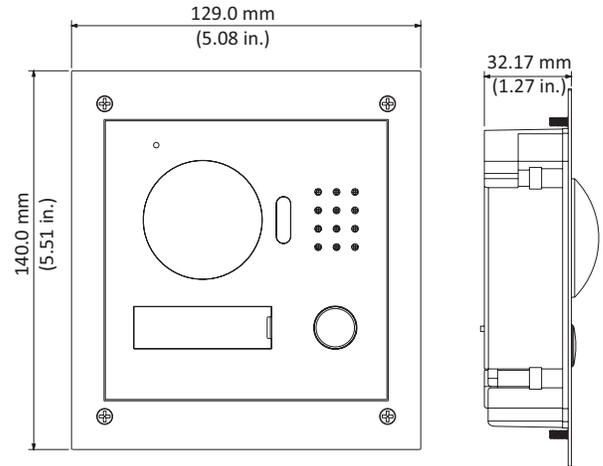

View Area

