


IP-5IR4080MZ-922


H.265 4MP IR Bullet Motorized Camera

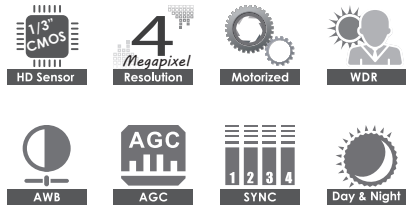

Key Features

- 1/3" CMOS
- Image Size: 2688 × 1520
- 0.05Lux@F1.2
- WDR, 2D/3D DNR
- 9~22mm Motorized Lens
- Audio I/O, Alarm I/O
- microSD (Up to 128GB)
- 12V DC, IP66

Dimensions

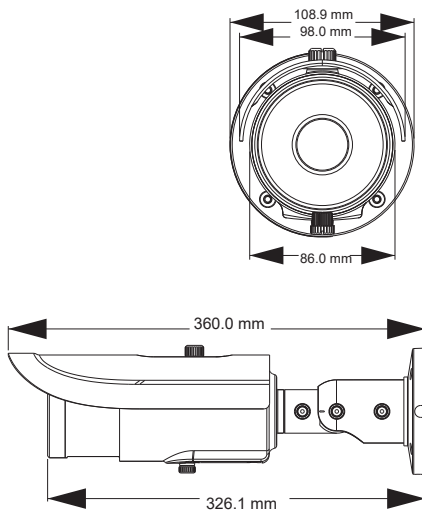

Specifications

Model	IP-SIR4080MZ-922
Camera	
Image Sensor	1 / 3" CMOS
Image Size	2688 × 1520
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Auto Iris	Fixed Iris
Min. Illumination	0.05 lux @ F1.2, AGC ON; 0 lux with IR
Lens	9 ~ 22 mm @F1.4 Motorized , angle of view: 29.5° ~ 16.2°
Lens Mount	Ø14
Day & Night	ICR
Wide Dynamic Range	120dB
BLC & HLC	Yes
Defogging	Yes
Digital NR	2D / 3D DNR
Image	
Video Compression	H.265 / H.264 / MJPEG
H.265 Standard	Main Profile @Leve4.1 High Tier
Resolution	4MP (2592×1520), 2K (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream	60Hz : 4MP (1 ~ 30fps) / 2K (1 ~ 30fps) / 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 4MP (1 ~ 25fps) / 2K (1 ~ 25fps) / 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate	64 Kbps ~ 10 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression	G711A / U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Audio	MIC IN × 1, MIC OUT × 1
Video Output	CVBS video output (BNC × 1)
Storage Card	Support SD card, up to 128GB
RS485	Yes
Alarm I/O	1 / 1 CH
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, UPnP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	SD card local storage, network remote storage
Smart Alarm	Motion alarm, sensor alarm
PTZ	RS485 × 1
IR Distance	230 ~ 328ft (70 ~ 100 m)
Water-proof	IP66
Others	
Power Supply	DC12V/ PoE
Power Consumption	< 16W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions	4.3" x 14.2" (Φ 109 × 360mm)
Weight (net)	3.75lbs (1700g)