

## GV-APOE0400 6-Port 10/100 Mbps Unmanaged PoE Switch with 4-Port PoE




- 6-port 10/100BaseTX, 4-port with Power over Ethernet
- IEEE 802.3at Compliant  
(4 Ports at Full 15.4 W / 2 Ports at Full 30 W)
- Max. 65 W power consumption
- CCTV Mode (with VLAN) for network cables up to 250 m (820 ft) at a reduced transfer rate
- 6" Metal Case of Palm Size
- Up to 4 GV-IP Camera support
- 4 KV Surge Protection

### Introduction

GV-APOE0400 is a 6-port 10/100 Mbps unmanaged PoE Switch with 4 PSE/PoE ports and 2 uplink ports. The switch supports IEEE 802.3at Power over Ethernet standard, with up to 32 W per port and a maximum power consumption of 65 W. In addition to not requiring special network cables for connecting your powered devices (PD), such as IP cameras, its CCTV mode also allows power supply over cables of up to 250 m (820 ft) in length, at 10 Mbps. The switch is designed for small network environment to strengthen its network connection and efficiency. It also provides the VLAN feature, enabled when under CCTV mode, for isolating each of the PoE ports for an enhanced forwarding rate of time.

### Dimensions

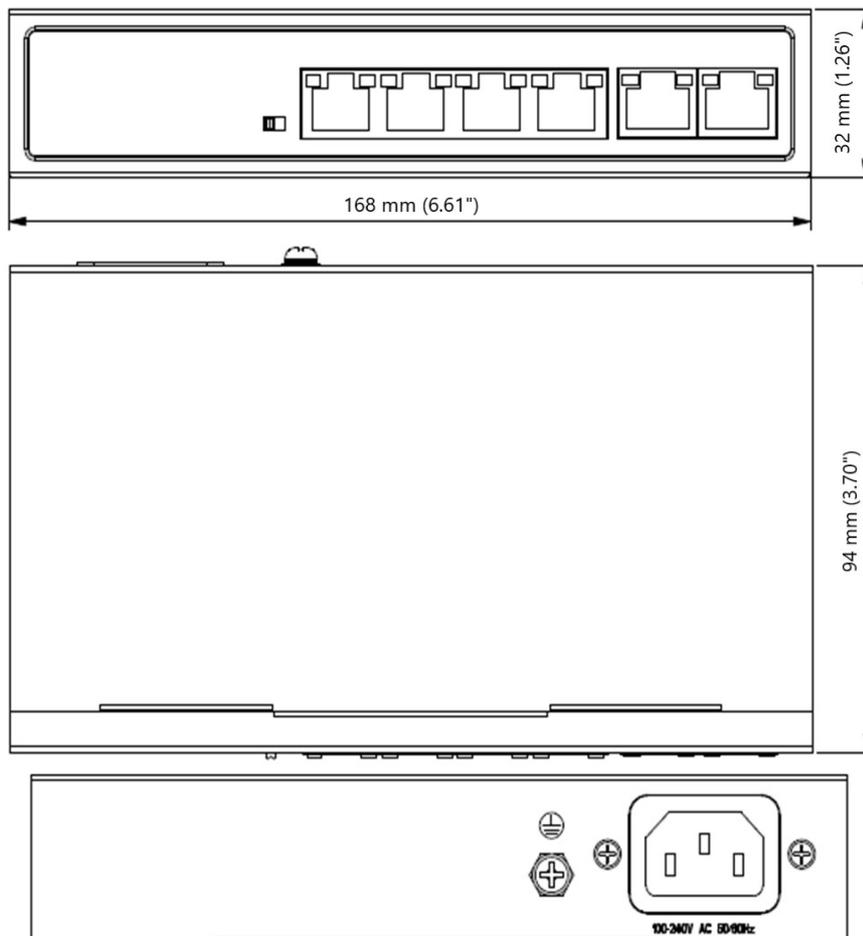

## Specifications

Ethernet		
Layer Supported	L2	
Ports		
Number of Ports	6 x 10/100 RJ-45 ports:	4 x PoE+ ports 2 x uplink ports
Performance		
MAC Address	2 K	
Buffer Memory	768 K bits	
Transmission Method	Store and Forward	
Transmission Media	10BaseT Cat. 5 UTP/STP 100BaseTX Cat. 5 UTP/STP	
Packet Forwarding Rate	0.89 Mpps	
Backplane Capacity	1.2 Gbps	
Mechanical Characteristics		
LED Indicators	Per Port: Link/Act PoE Act/Status Power	
Electrical Characteristics		
	Input	100 ~ 240 V/AC, 50 ~ 60 Hz
PoE Power	Output	IEEE 802.3at Compliant Voltage, Per Port Max. 32 watts (4 Ports at Full 15.4 W / 2 Ports at Full 30 W)
PoE Power Supply Type	End-Span (1, 2+, 3, 6-)	
Max. Power Consumption	65 W	
PoE Budget	60 W	
General		
Dimensions (H x W x D)	32 x 168 x 94 mm (1.26" x 6.61" x 3.70")	
Weight	0.5 kg (1.10 lb)	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-20°C ~ 90°C (-4°F ~ 194°F)	
Humidity	10 to 90% RH (non-condensing)	
Surge Protection	±4 KV	
Standards and Regulatory		
Standards	IEEE-802.3at PoE+ / PSE IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3x Flow Control	
Regulatory	CE, FCC Class A, RoHS compliant	

**Note:** Specifications are subject to change without notice.

## Packing List

1. GV-APOE0400
2. AC Power Cord
3. Rubber Feet x 4

Front View



Rear View

