

# Simplex 3000 series



## Narrow stile mechanical pushbutton lock

Simplex mechanical pushbutton locks eliminate problems and costs associated with issuing, controlling, and collecting keys and cards.

The Simplex 3000 mechanical pushbutton locks provides exterior access by combination for narrow stile aluminum glass doors. This fully mechanical lock eliminates the material and labor expense of battery replacements, has a single access-code and is programmed via the keypad without removing the lock from the door.

### Features

**No Battery:** Fully mechanical lock eliminates the material and labor expense of battery replacements.

**Number of Codes:** Single access code—one easy-to-manage code for all users.

**Programming:** Lock is easily programmed via keypad without removing lock from the door.


**Handing:** Non-handed; required drive assembly is factory-handed, not field reversible.

**Economical:** A cost effective access control solution.

#### Operation Modes


- Pushbutton Access
- Passage  
Allows access without using the lock entry code. Feature activated from the outside using cylinder override key.
- Lockout  
Disables the lock so that entry code cannot be used to gain access. Access is permitted using the key override only. This is activated from the outside using the cylinder override key.

### Model 3001



- Combination Entry
- Key Override (cylinder not supplied)
- Passage
- Lockout

### Model 3002




- Combination Entry
- Key Override (cylinder not supplied)
- Cylinder Guard
- Passage
- Lockout

## Specifications:

Mechanical Features	
Construction	All metal cast front housing, force-resistant, clutch-protected fixed thumbturn
Numeric Keypad	Vandal resistant, solid metal pushbuttons
Finishes	Satin Chrome 26D (626); 55 (695) Duranodic
Stile Width	1 $\frac{7}{8}$ " (48 mm) minimum, required for mounting
Latch	Purchased separately (Adams Rite)
Cylinder	Key override with mortise cylinder (not included)
Backset	Model 3010: Right Hand; Right Hand Reverse—3 $\frac{1}{32}$ " (25 mm) Model 3020: Left Hand; Left Hand Reverse—3 $\frac{1}{32}$ " (25 mm) Model 3030: Right Hand; Right Hand Reverse—1 $\frac{1}{8}$ " (29 mm) or 1 $\frac{1}{2}$ " (38 mm) Model 3040: Left Hand; Left Hand Reverse—1 $\frac{1}{8}$ " (29 mm) or 1 $\frac{1}{2}$ " (38 mm)
Strike	Sold separately (dormakaba RCI, Adams Rite or Kaba Ilco Corp.)
Weight	4lbs (1.8 kg)
Installation	
Door thickness	1." (44 mm) maximum
Items Supplied Include	Installation instructions, full-scale template, combination change key, and screwdriver
Certification and testing	
Durability	Weather resistant
Warranty	1-year

## Application:

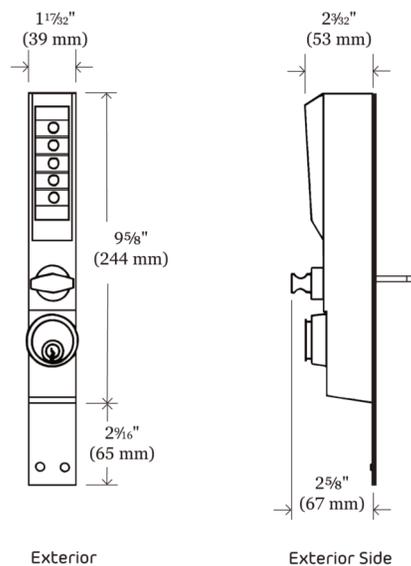

Copyright © 2019 dormakaba USA Inc. Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation. Printed in USA.

dormakaba USA Inc.  
6161 E 75th Street.  
Indianapolis, IN  
USA 46250  
T: 1 800 523 8483