


# HD-TVI Vandal Proof Dome Camera CMHD7422B



## Key Features:

- HD 1080P Video Output
- Adopt HDTV Technology
- True Day/Night
- Smart IR
- 65ft(20m) IR distance
- OSD Menu via UTC technology with Platinum TVI DVR
- Aluminum housing
- Vandal-proof
- 3-axis

## Dimensions:

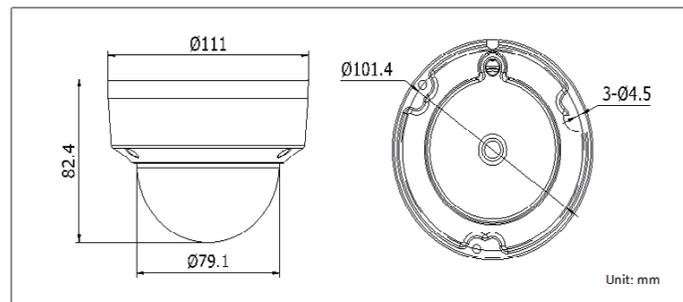

# HD-TVI Vandal Proof Dome Camera CMHD7422B

| CAMERA                        |   |
|-------------------------------|---|
| Image Sensor                  | 1/2.9" CMOS   |
| Signal System                 | NTSC/PAL  |
| Effective Pixels              | 1930(H)*1088(V)   |
| Min. Illumination             | 0.01 Lux, 0 Lux with IR   |
| Shutter Speed                 | 1/30(1/25) s to 1/50,000 s  |
| Lens                          | 3.6mm Lens<br>Angle of View: 84.3°  |
| Day & Night                   | ICR   |
| Synchronization               | Internal  |
| Video Frame Rate              | 1080p@30fps/1080p@25fps   |
| HD Video Output               | 1 HD-TVI Output   |
| S/N Ratio                     | More than 52dB  |
| MENU                          |   |
| AGC                           | Support   |
| D/N Mode                      | Color/ BW/ Smart  |
| White Balance                 | ATW/MWB   |
| Language                      | English   |
| Function                      | Digital noise reduction, Mirror   |
| GENERAL                       |   |
| Working Temperature /Humidity | -40 ° F - 140 ° F (-40° C - 60° C)<br>Humidity 90% or less (non-condensing) |
| Power Supply                  | DC 12V  |
| Power Consumption             | Max. 3W   |
| Weather Proof Ratings         | IP66  |
| IR Range                      | Up to 65ft(20m)   |
| Dimension                     | φ4.4" x 3.2" (φ111.0 x 82.4mm)  |
| Weight                        | 1.2lb(550g)   |