


## LTB742-120

### Wall Mounting Bracket for CMIP7D42W-28MI

#### Features:

- Aluminum alloy with surface treatment
- Waterproof rubber designed for indoor / outdoor applications
- Outlet hole improves appearance
- Superior waterproofing design
- Matched junction box includes waterproof stopper

#### Dimensions:

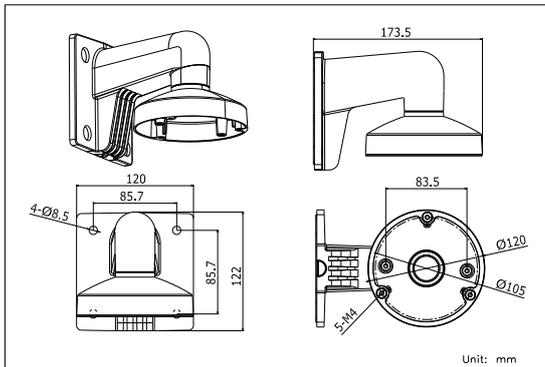

#### Parameters:


Model	LTB742-120
Parameters	Φ 120 Wall Mounting Bracket for Mini Dome Camera
Appearance	White
Range of Application	Suitable for dome camera wall mounting
Materials	Aluminum Alloy
Dimensions	4.72 x 4.8 x 6.8 in. (Φ 120 x 122 x 173.5 mm)
Weight	Approx. 1 lb (440 g)

#### Notice:

- The bracket should be installed on a flat wall
- Waterproof rubber piece is necessary for outdoor applications
- The wall must be capable of supporting over 3 times the total weight of the camera plus the mount
- Maximum load capacity of mount is 9.9 lbs (4.5 kg)


#### Installation:

- ① Choose the appropriate wall and thread camera wire through mount aperture




A: Reserved hole for wiring

- ② Affix adapter to bracket and thread the wire




B: Tightening Screw


- ③ Screw adapter to wall

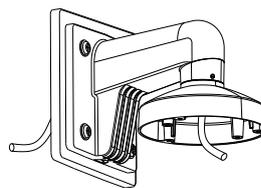


- ④ Remove transparent cover and align adapter with plate

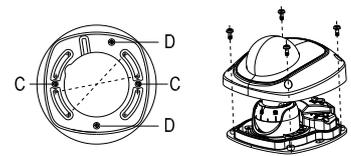


- ⑤ Install the adapter to the bracket and screw together




- ⑥ Connect the camera wire and affix the camera to the adapter plate



- ⑦ Modify camera angle, install the transparent cover and screw together



- ⑧ Bracket installation is now complete.



**Note:** The actual bracket may vary from the picture above.