

LTH-M201-6B **Video Intercom Nametag Module**



Key Feature

- Dial the resident at one-touch
- Backlight compensation
- Easy and extend














Specification

Model		LTH-M201-6B
System parameters	Processor	Embedded MCU Processor
	Operation method	Physical Button
Interfaces	Module-connecting	2(1 Input, 1 Output)
	Debug	1
General	Physical button	6
	DIP Switch	8
	Power supply	Powered by LTH-M201-C
	Power consumption	≤2 W
	Working temperature	-40° C to +60° C (-40° F to 140° F)
	Working humidity	10% to 95%
	IP protection level	IP65
	Installation	Flush Mounting, Surface Mounting
	Dimensions (L × W × H)	98.21 mm × 100.21 mm × 33.7 mm (3.87" × 3.95" × 1.33")

Appearance and Interface

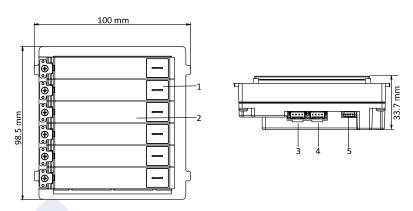

No.	Description	
1	Call Button	
2	Name Tag	
3	Module-connecting Interface(output)	
4	Module-connecting Interface(input)	
5	Debug	

© 2019 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners







