


Seeing is believing.

Designed with both property managers and residents in mind, CAPXLV's customizable applications help streamline the management of residents, buildings and community access points. Enhance your monitoring capabilities with subscription-based live video streaming, recorded events and the ability to add resident app licenses.

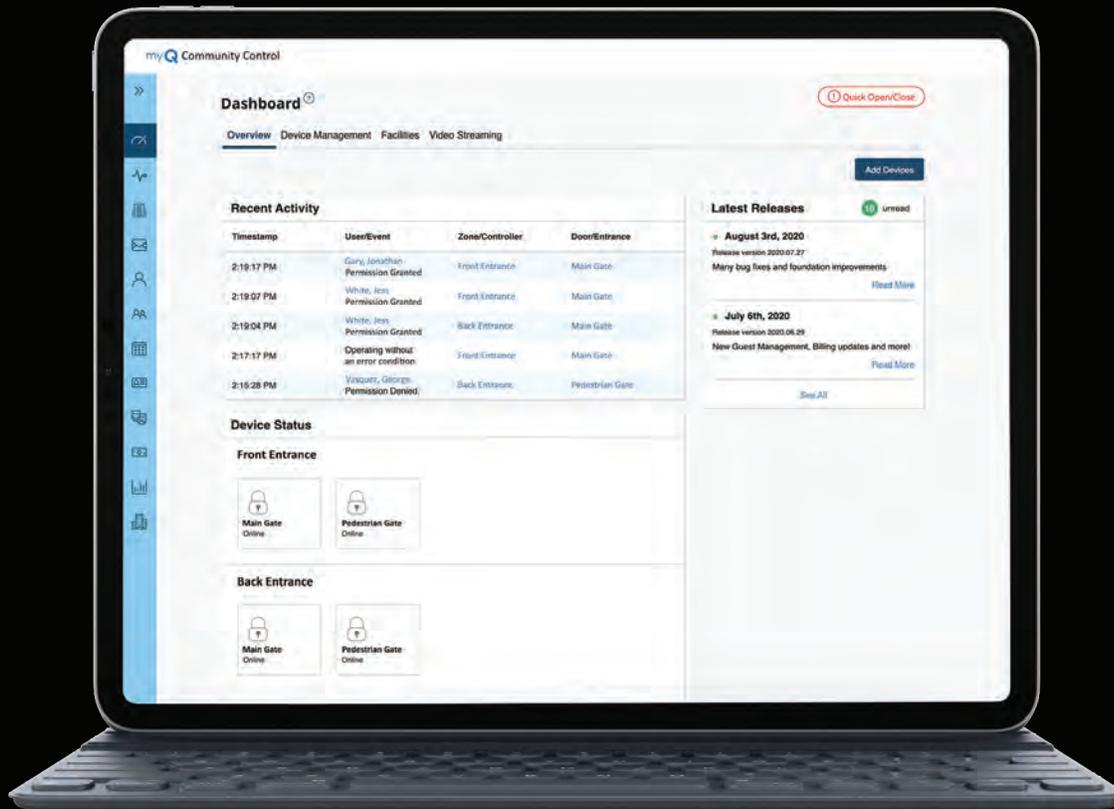


A scalable cloud-based solution

Conveniently manage and control multiple access points across all communities in your portfolio from a single dashboard. Streamline access management with myQ® Community Control, a cloud-based platform that enables remote features such as adding/deleting residents, assigning access to specific entrances and approving guest/event requests.

MAXIMIZE
EFFICIENCY

PERFORM
UPDATES FROM
ANYWHERE

STREAMLINE
OPERATIONS

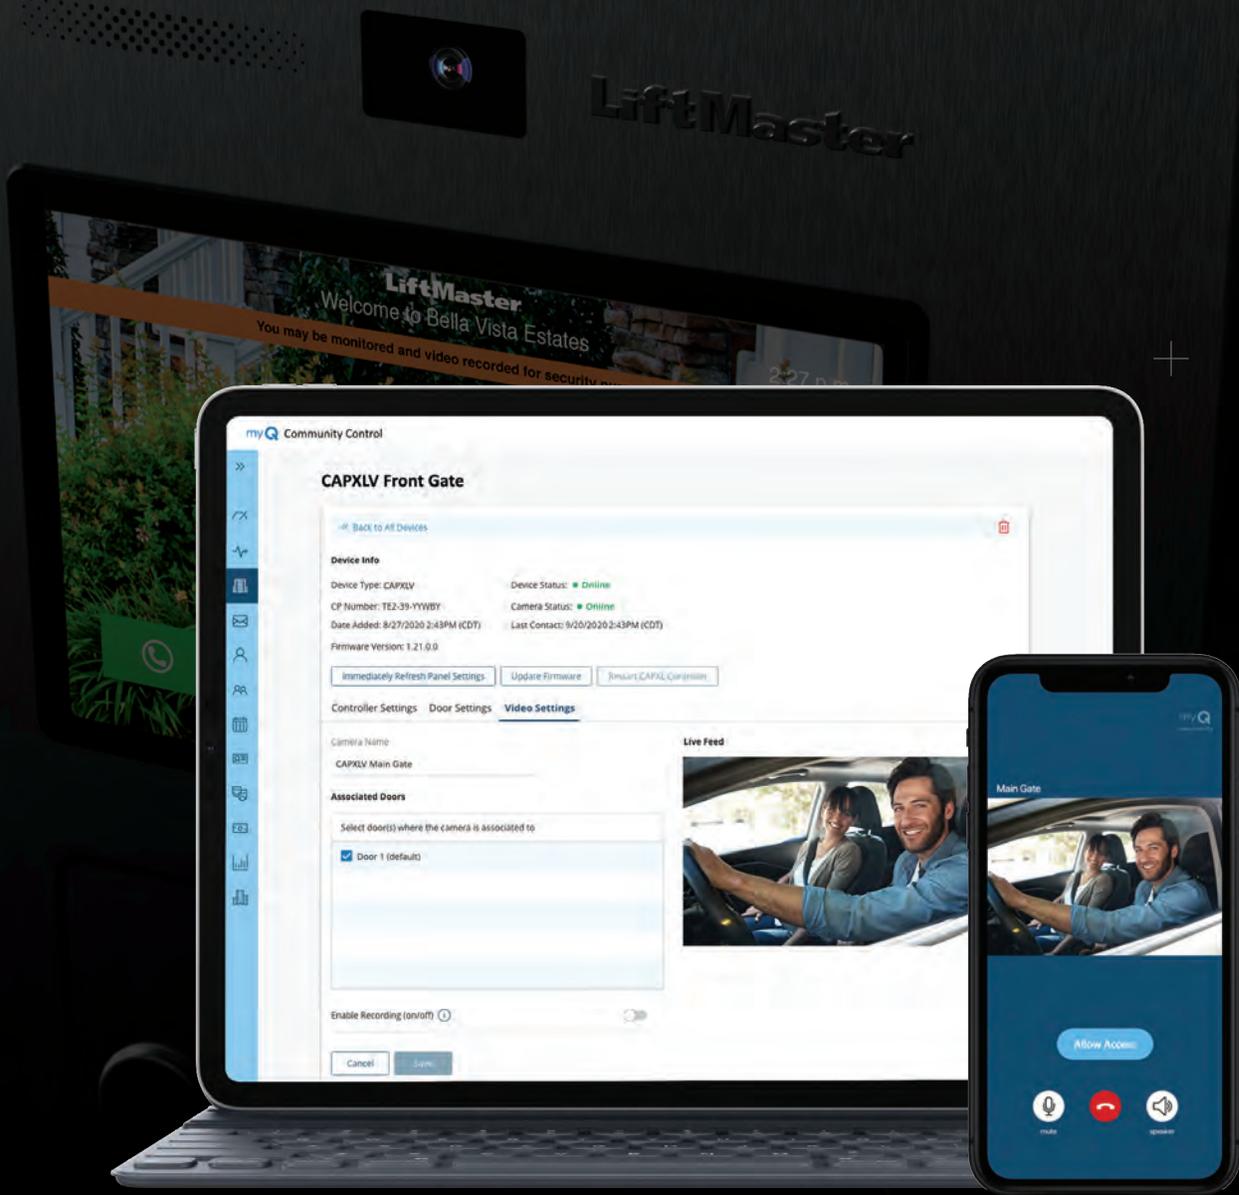

Enhance your security

With a myQ Community Control subscription, you can securely manage how and when residents and visitors access each entrance across every community you manage. Plus, receive real-time notifications and benefit from remote diagnostics for detecting and addressing issues before your residents are even aware.

Provide visual confirmation and control with the Community by myQ app

Give your residents the ability to manage property access from their smartphone. Through the app's one-way video calling and two-way voice communication, residents can safely identify guests and confidently grant/deny access from anywhere.

CAPXLV

Connected Access Portal,
High Capacity with Video

The CAPXLV has an intuitive interface with a high-definition color touch display and customizable background that provides residents with the modern experience they desire.

Popular features

Water and sand-proof gasket protects touchscreen

Integrated video camera captures video clips for every access event

A subscription to the Community by myQ® app allows residents to visually identify guests, open the gate or door remotely, and grant managed access with their smartphone



Customizable background and picture-in-picture function

Durable, scratch resistant and capacitive 10-inch high-definition color display touchscreen

Proximity reader for credentialed access (optional)

Postal lock

Stainless steel cabinet (optional trim kit available)

Built-in speakers provide digital call quality

Integrated camera

- 135° wide angle camera provides a view of access points through a live feed or recorded event through the myQ Community Control web application
- Receive alerts and HD video recordings when an access event is triggered
- Night vision functionality for greater image quality in high and low light environments
- Climate performance includes extreme climate operating range of -20° to 130°F

Engineering and diagnostic capabilities

- Fade resistant, high-definition color touch display and customizable backgrounds
- Advanced self-diagnostics reduces downtime by troubleshooting and identifying when service is needed
- UL 294 listed for commercial settings
- Eliminates trenching with a wireless link to LiftMaster® gate operators

Cloud-based security

- Two factor authentication protects and safeguards resident data
- Easily connects to myQ Community Control to manage multiple entry points and communities from a single dashboard
- Meets California Consumer Privacy Act (CCPA) requirements

Resident guest management

- Residents can grant temporary access instead of handing out their personal entry code
- Residents easily set up and manage their own guest list for one-time, multi-day or recurring events
- Invited guests are automatically emailed custom trackable entry codes, active only during the event
- Community manager retains overall control, setting limits on the number of guests that can be invited and the number of events a resident can create before requiring manager approval
- Certain people and groups can easily be blocked from creating events
- Unique guest-management-only page with myQ Community Control, each resident uses their own individual log-in and password


Customized system control

- Set schedules for the facility by person, time and location
- Six customizable program administration roles so each administrator has his/her own log-in with customizable management levels
- Configurable email notifications alert you to use of a suspended code, tell you when codes are overused or if service is needed for the CAPXLV, CAP2D or gate operator



See everything in wide-angle video

The CAPXLV integrated camera gives you a wide angle video stream in crystal clear quality—perfect for identifying any issue at an entrance.

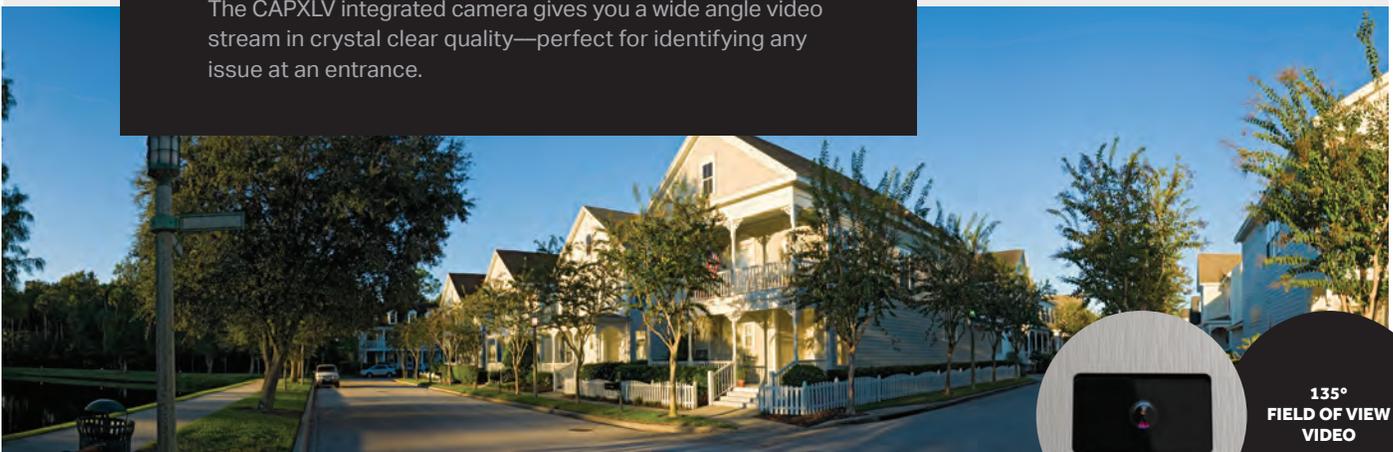

**135°
FIELD OF VIEW
VIDEO**

Enhance your CAPXLV system

Provide your residents with an unparalleled access experience adding myQ® Community Control Guest Management and the Community by myQ app to your amenities. These work seamlessly with the LiftMaster® full line of smart access products and accessories.

CAP2D



Connected Access Portal, 2-Door Controller

A scalable access solution for entrances which display and voice capabilities are not a requirement

LMSC1000



RFID Long Range Reader with Vehicle Tags

Reads RFID vehicle tags 20' – 30' away reducing vehicle congestion

KPR2000



Wired Keypad and Proximity Reader

Single-entry multi-function access controller with integrated keypad and card reader

PPV3M / PPK3PHM / PPLK1-X



Passport Visor and Keychain Remote Controls with Unique Credentialed IDs

Offers residents a single solution to access gate, garage and other community entry points*

CAPXLTK



Trim Kit and Back Kit for CAPXLV

Ideal for flush mounting of a CAPXLV system into a cutout of a wall or flat surface



Video Subscriptions

Add live video streaming, recorded events and the ability to add resident app licenses

*3-Button Passport MAX Remote Controls compatible with the CAPXLV and PPWR Receiver for gate access control and LiftMaster Security+ 2.0 (Tri-band 310/315/390 MHz) and backwards compatible to Security+® (315/390 MHz) residential garage openers. 1-Button Passport Lite Remotes not compatible with LiftMaster residential garage door openers.



Gated Entrances

Compatible with CAPXLV, CAP2D, KPR2000, RFID and Passport Remote Controls



Pool Access

Compatible with CAP2D, KPR2000 and Passport Remote Controls



Facility Access

Compatible with CAP2D, KPR2000 and Passport Remote Controls



Trim and Back Kit

Compatible with CAPXL and CAPXLV



Specifications

Construction

- 10", 720p high-definition, fade and glare-resistant touchscreen display with picture-in-picture
- Compatible Wiegand Input formats: 26 Bit, 30 Bit, 37 Bit (HID), 37 Bit (Transcore), and 32 Bit (MiFare)
- No facility code limitations (1–256 for 26 Bit); "Ignore Facility Code" option available
- Postal Lock Provision
- UL 294[®] Listed
- 2 year warranty
- Mounting: surface, flush (CAPLTK) or pedestal mount (PED42, PED64)

Dimensions

- CAPXLV: 18" x 14" x 4.5"
- CAPLTK (Trim Kit): 23.75" x 19.375"

Video

- Camera resolution: 1080p
- Frames per second: 25FPS
- Field of view: 135°
- Storage: up to 1000 events locally and in the cloud
- Phone.com[®] service required for VoIP and video calls (additional charges apply)

Voice

- DSP, clear, unparalleled audio communications in noisy environments
- VoIP phone service; calls 10-digit numbers
- Phone.com[®] service required for VoIP (additional charges apply)

Power

- 24VDC, 60W (min.), class 2 output, Level VI efficiency, (power supply input 100-240VAC, 2A 50/60Hz)
- Power supply included

Operating Temperatures

- -20°F to 130°F (-29°C to 54°C)

Built-In Security+ 2.0[®] Radio Onboard

- Integrated Passport Receiver with Security+ 2.0

Input Ports (4 Independent Doors of Control per CAPXLV)

- 4 Wiegand Inputs
- 4 Request-to-Exit (REX) Inputs
- 4 Supervised Inputs
- 1 Auto-Call Input (requires LPEXP)

Outputs* (4 Independent Doors of Control per CAPXLV)

- 4 Primary Relays and 4 Auxiliary Relays
- 12 VDC, 250mA power output for Wiegand devices
- 1 Wiegand (26 Bit) output for elevator or enterprise access control integration
- Controls 4 gates/doors; wirelessly link LiftMaster UL 325 gate operators, (mfd. after October 2017); no need to trench

* SPDT, Rated load 3 amps at 30VDC (each)

Codes & Capacities

- 4 to 8 digit entry codes; 4 to 6 digit directory codes
- 50,000 local user capacity per unit
- 50,000 local event history per unit
- Holiday and hold-open scheduling, including one-time and repeating exceptions

Communication

- Internet via wired Ethernet 10/100/1000 (DHCP, static configuration), or Wi-Fi (DHCP configuration only)
- Cellular-based Internet (CAPCELL) not recommended for applications with video features
- Dedicated video bandwidth per CAPXLV: Recommend a minimum upload bandwidth of 5Mbps. This upload speed should be met when considering usage of other devices on the network like cameras and computers.

Shipping Weight (1 Carton - 23" x 18" x 9"): 24 lbs.

- Includes: 24VDC power supply, gasket set, 2 keys, radio antenna, Wi-Fi antenna, misc. hardware, manual

Access Data Management

- myQ Community Control subscription plan required per community
- Guest management, 30 days video storage and video licenses are powerful, optional add-on's

Business partners

For Sales | 800.282.6225

For Technical Support | 800.528.2806

For Billing | 800.323.2276

To Learn More | myQ.com/Community



© 2020 The Chamberlain Group, Inc. All Rights Reserved. | LMPAENPGCAPXLV 9/20

LiftMaster, the LiftMaster logo, myQ and the myQ logo are registered trademarks of The Chamberlain Group, Inc. UL[®] and the UL logo are trademarks of UL LLC. Wi-Fi[®] is a registered trademark of Wi-Fi Alliance. HomeLink[®] and the HomeLink House[®] logo are registered trademarks of Gentex Corporation.

