



DM62 SERIES

1,200 lbs Holding Force Double M62 Magnalock®

The Ultimate Magnalock® Double Magnet for Indoor/Outdoor Higher Security

The versatile DM62 electromagnetic lock offers strength and ease of maintenance for interior, perimeter and exterior access control - in a compact double magnet. This all-in-one unit is designed for double doors with no mullion. With unsurpassed durability, the DM62 will last long after most buildings wear out.

PRODUCT FEATURES

- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- Fully sealed for weather-proof operations
- 3' [1 m] of jacketed, stranded conductor cable for each lock
- Automatic dual-voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression with included MOV
- Efficient, low power usage
- Rust resistant - all ferrous metal surfaces plated for durability
- MagnaCare® lifetime replacement, no fault warranty

PRODUCT OPTIONS

- (B) BondSTAT™ magnetic bond sensor - Patented (MBS)
- (D) Integrated door position switch (DPS)
- (OS) Offset strike plates

SPECIFICATIONS

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/BHMA A156.23, Grade 1; E08511-1000
- CSFM- California State Fire Marshal Approved
- Patent: 8,094,017

Holding Force:
1,200 lbs [544kg] per lock


Dimensions:
Magnalock: 22"L x 1-3/4"D x 3"H
Strike: 6"L x 1/2"D x 2-3/4"H each

Electrical:
250 mA at 12 VDC/lock
150 mA at 24 VDC/lock

Operating Temperature:
-40 to +140F [-40 to +60C]
Indoor or Outdoor use

Shipping Weight:
16 lbs [7.26kg]


Finishes:
US32D/630 - Satin Stainless Steel Finish

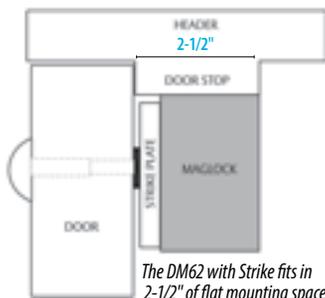

MODELS

MODEL	PART #	Description
DM62	M62 [Double]	- 12/24 VDC
DM62B	M62 [Double]	- 12/24 VDC, MBS
DM62BD	M62 [Double]	- 12/24 VDC, MBS, DPS
DM62B-OS	M62 [Double]	- 12/24 VDC, MBS w/ Offset Strike
DM62D	M62 [Double]	- 12/24 VDC, DPS
DM62-OS	M62 [Double]	- 12/24 VDC w/ Offset Strike
ASCWB-DM62CL	Alum 1-1/2" Spacer	- Concrete/Wood Bracket, DM62, Clear

For flexible mounting brackets, see page 28.

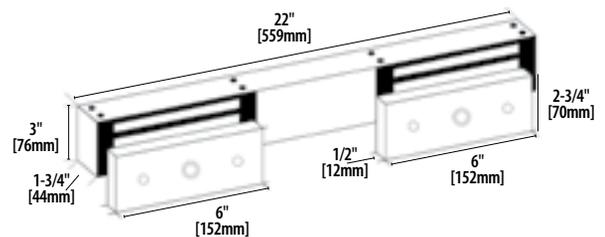

DUAL VOLTAGE



GRADE 1



FIRE RATED

