

tres900

Transponder and Reader Engineered Systems, Inc.

**Value Engineered for
the Supply Chain, WIP,
Asset Monitoring and
Vehicle ID Industries**

**902 to 928 MHz Frequency Hopping
Long Read Ranges - 18 to 25 ft.
Output: Wiegand, Serial, or TCP/IP
Read/Write Any EPC Gen2 tag**

The tres900 reader is value engineered to meet your most demanding applications for asset and personnel monitoring, vehicle ID and supply chain management. Integrated antenna design means simple installation and functionality in a single, low profile design. tres900 is environmentally sealed allowing for indoor and outdoor installations with a UV resistant housing. Upgradeable firmware allows for protocol expansion and feature upgrades. High gain circular polarized antenna for maximized read ranges. DSP (digital signal processing) for multi tag anti-collision capabilities. Able to accomplish multi reader synchronization for interference reduction.



Transponder and Reader Engineered Systems, Inc
2142 O'Neal Lane Suite 354 | Baton Rouge, LA 70816
Phone (888) 574-tres (8737)
sales@tresrfsolutions.com | www.tresrfsolutions.com

tres900

Transponder and Reader Engineered Systems, Inc.


**Value Engineered for
the Supply Chain, WIP,
Asset Monitoring and
Vehicle ID Industries**

tres900 Passive UHF Reader Specifications	
Operating Frequency	902MHz ~928MHz (860-960 MHz built-in)
RF Protocol	ISO18000-6B, EPC Class 1, EPC Class 1 GEN 2
Operating Method	FHSS or fixed frequency (set by software)
Antenna Ports	Internal 7dBi circular polarized antenna 7:10 H/V
Max RF Power	30 dBm (1 Watt)
RF Power Range	20~30 dBm, Software Adjustable
Tag ID Modes	Timed Mode - automatically reads at fixed time Trigger Mode - external trigger control to read Master/slave Mode - Under software control
Identity Tag Time	<8ms Identity single tag
Reading/Writing Tag Time	Reads every 8 bytes in less than 5ms Writes every 4 bytes in less than 25ms
Reading/Writing Range	18 to 25 feet
Communication Interface	RS-232, Wiegand, TCP/IP
Input	One way trigger input for master/slave configuration
Power Supply	8 to 16 VDC 2A included
Power Consumption	≤5W
Size	(10.19 X 10.19 X 3.74 inches) 260mmx260mmx90mm
Work Temperature	-20 C° to + 70 C°
Work Status Indication	Audible Buzzer
Certifications:	FCC Part 15, CE Mark

Distributed By



Mounting Bracket (pictured below) and Reader Power Supply included at no additional charge

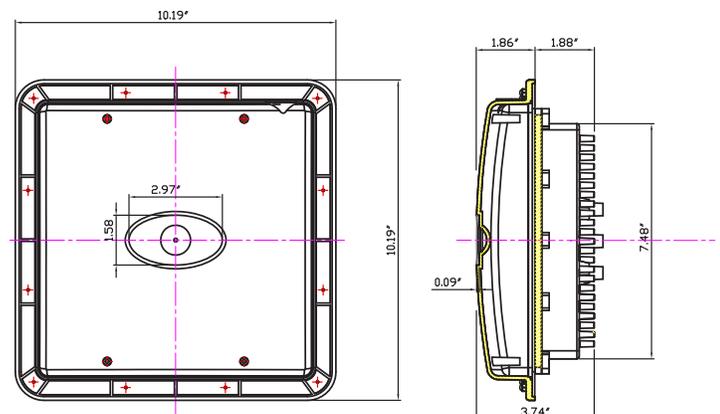

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
1) this device may not cause harmful interference, and; 2) this device must accept interference received, including interference that may cause unintended operation. FCC ID: A379502



Transponder and Reader Engineered Systems, Inc
2142 O'Neal Lane Suite 354 | Baton Rouge, LA 70816
Phone (888) 574-tres (8737)
sales@tresfsolutions.com | www.tresfsolutions.com