

MODEL:

SR12UB

SmartRack® Premium Extra-Depth Rack Enclosure



12 Rack Units



1000 lb.
Stationary
Load Rating



1000 lb.
Rolling
Load Rating



Heavy-Duty
Casters



Locking Doors
& Side Panels



Accommodates
Standard
19-inch
Equipment



Toolless
Mounting Slots



Adjustable
Rails with
Easy-View
Depth Index



Airflow
Exceeds
Server OEM
Requirements




Integrated
Baying Tabs



Square Hole
Mounting

- A** Adjustable Mounting Rails
- B** Roof Panel
- C** Front Door
(Lockable/Removable/Reversible)
- D** Rear Door
(Lockable/Removable/Reversible)
- E** Side Panels
(Lockable/Removable)
- F** Heavy-Duty Casters
- G** Heavy-Duty Levelers
- H** Keys
(For doors and side panels)
- I** Cable Access Panel

Also Includes: Owner's manual,
2 stabilizing brackets and rack-mount
equipment mounting hardware
(36 cage nuts, 36 mounting
screws, 36 nylon cup washers)

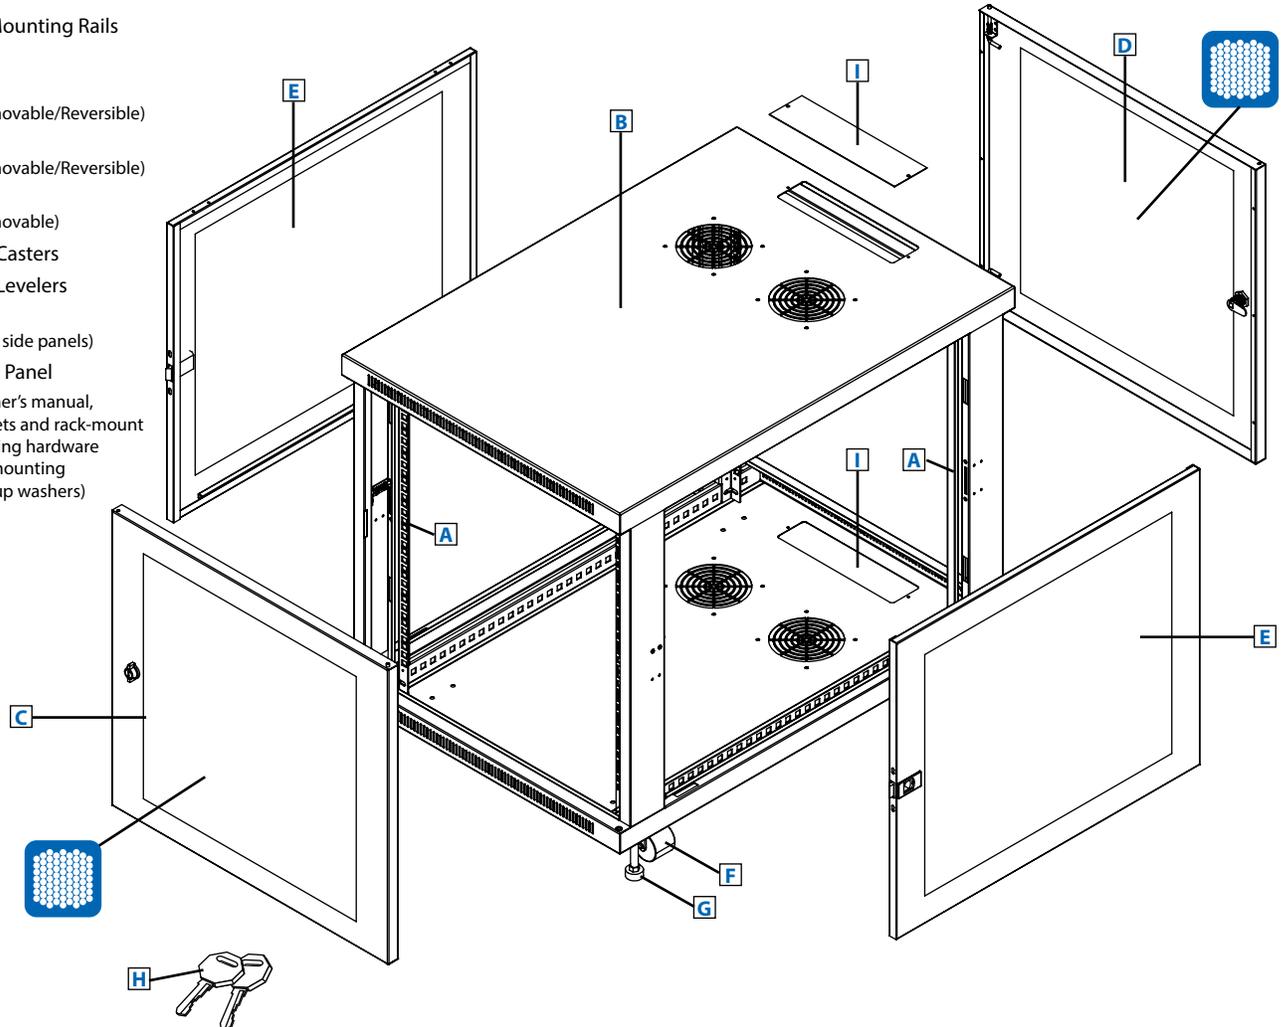

- Modular design optimized for quick configuration and reconfiguration
- Ideal for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com



Specifications

Model	SR12UB
Rack Spaces	12U
Stationary Load Rating	1000 lb. (454 kg)
Rolling Load Rating	1000 lb. (454 kg)
Unit Dimensions [H x W x D]	25.1 x 23.6 x 33.5 in. (637.5 x 600.2 x 850.9 mm)
Shipping Dimensions [H x W x D]	29.7 x 27 x 36.6 in. (754.4 x 685.8 x 929.6 mm)
Unit Weight / Shipping Weight	105 lb. (47.63 kg) / 123 lb. (55.79 kg)
Standards	Tested to UL 60950, EIA-310-E, NOM, RoHS (Accommodates all standard 19-inch rack-mount equipment regardless of vendor.)

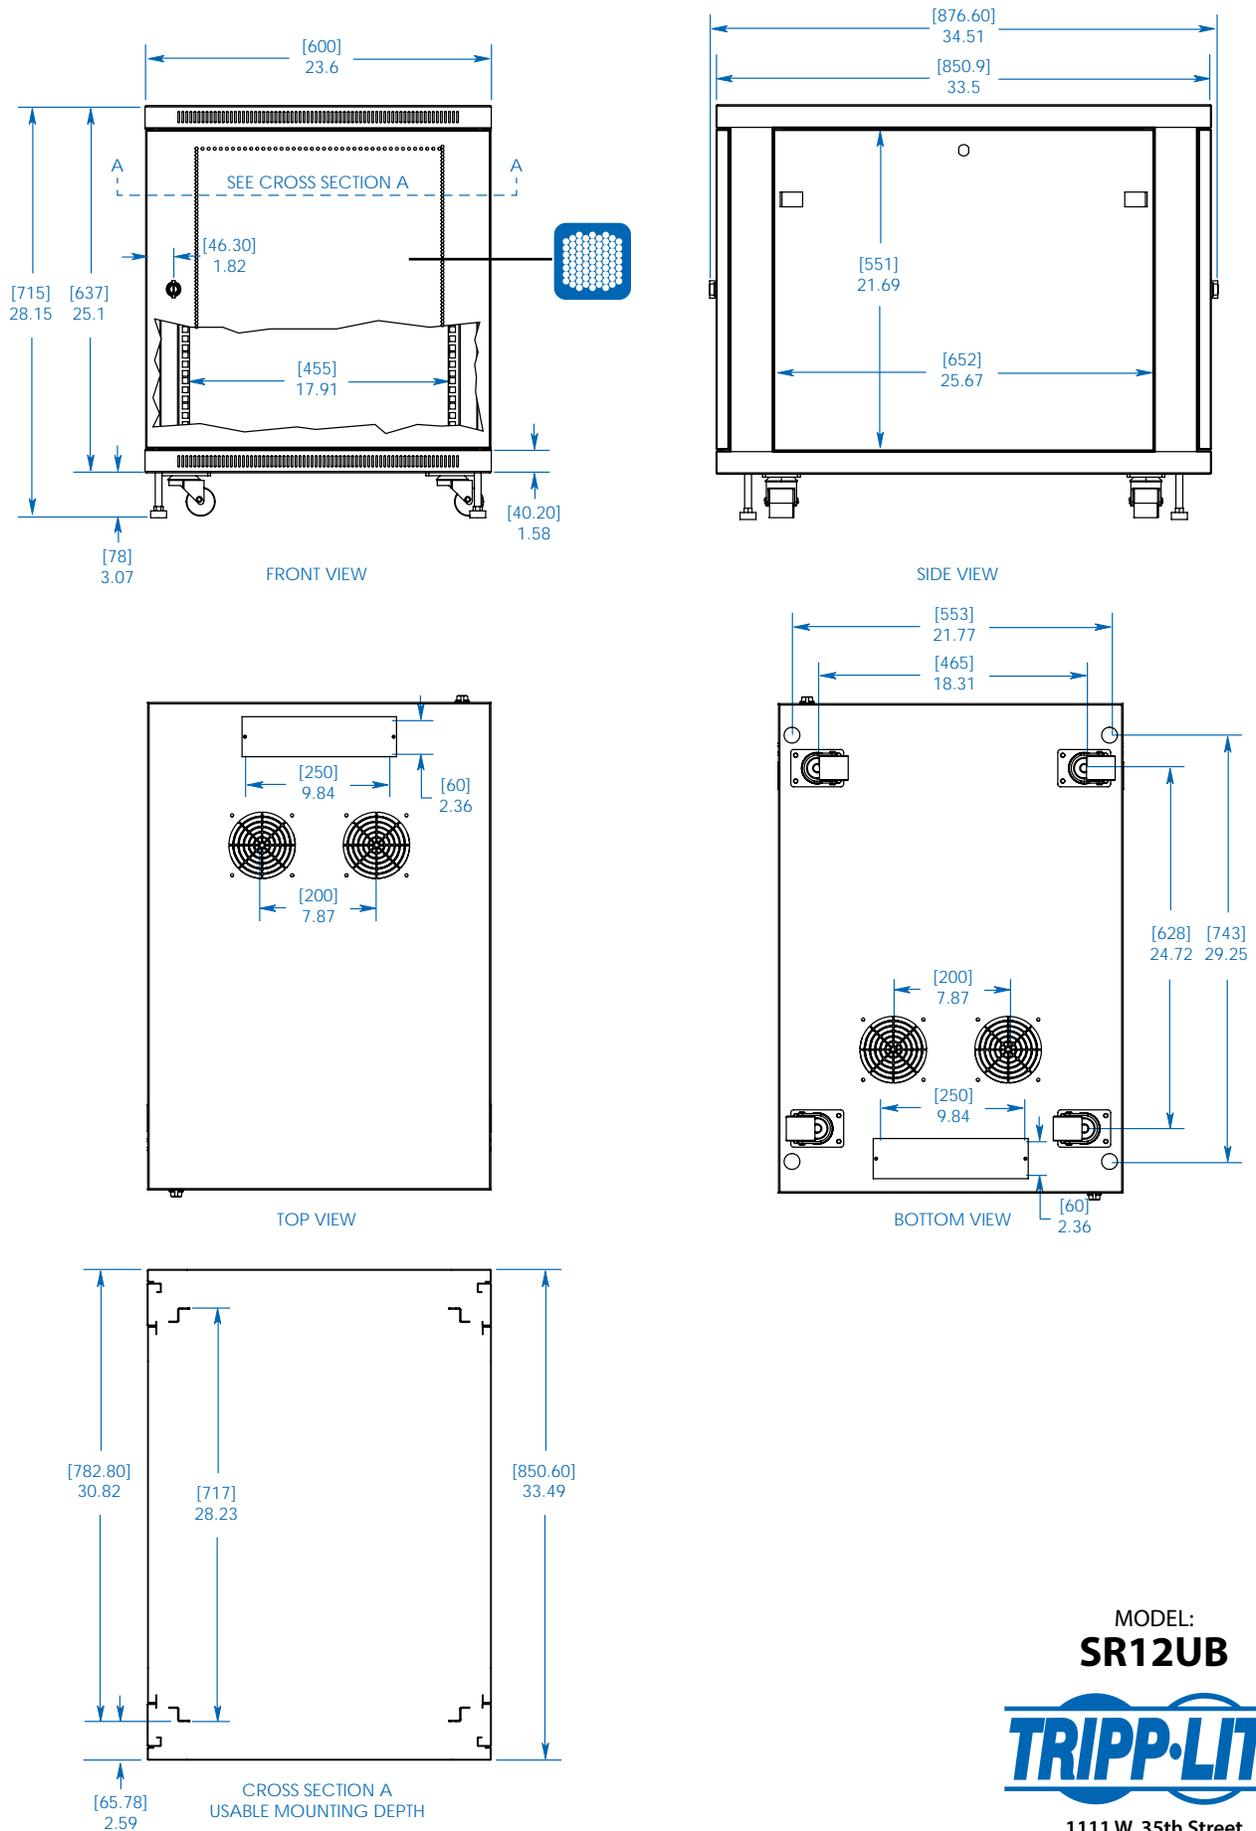

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SR12UB

TRIPP·LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com