

MODELS:

SR42UBMDND / SR42UBMDEXPND

SmartRack® Mid-Depth Rack Enclosures



42 Rack Units



3000 lb.
Stationary
Load Capacity



2250 lb.
Rolling
Load Capacity



Rolling
Casters



Locking
Side Panels



Standard 19-inch
Rack Width



Toolless
Mounting Slots



Adjustable
Rails with
Easy-View
Depth Index




Integrated
Baying Tabs



Square Hole
Mounting

- A** Adjustable Mounting Rails (4)
- B** Adjustable PDU Mounting Rails with Toolless Mounting Slots (2) (Hold up to 4 vertical PDUs.)
- C** Roof Panel (Removable)
- D** Side Panels (4) (Lockable/Removable; not included with SR42UBMDEXPND.)
- E** Rolling Casters (4)
- F** Levelers (4)
- G** Keys (For side panels.)

Also Includes: Owner's manual, 2 shipping/stabilizing brackets and rackmount equipment mounting hardware (50 cage nuts, 50 mounting screws, 50 nylon cup washers).

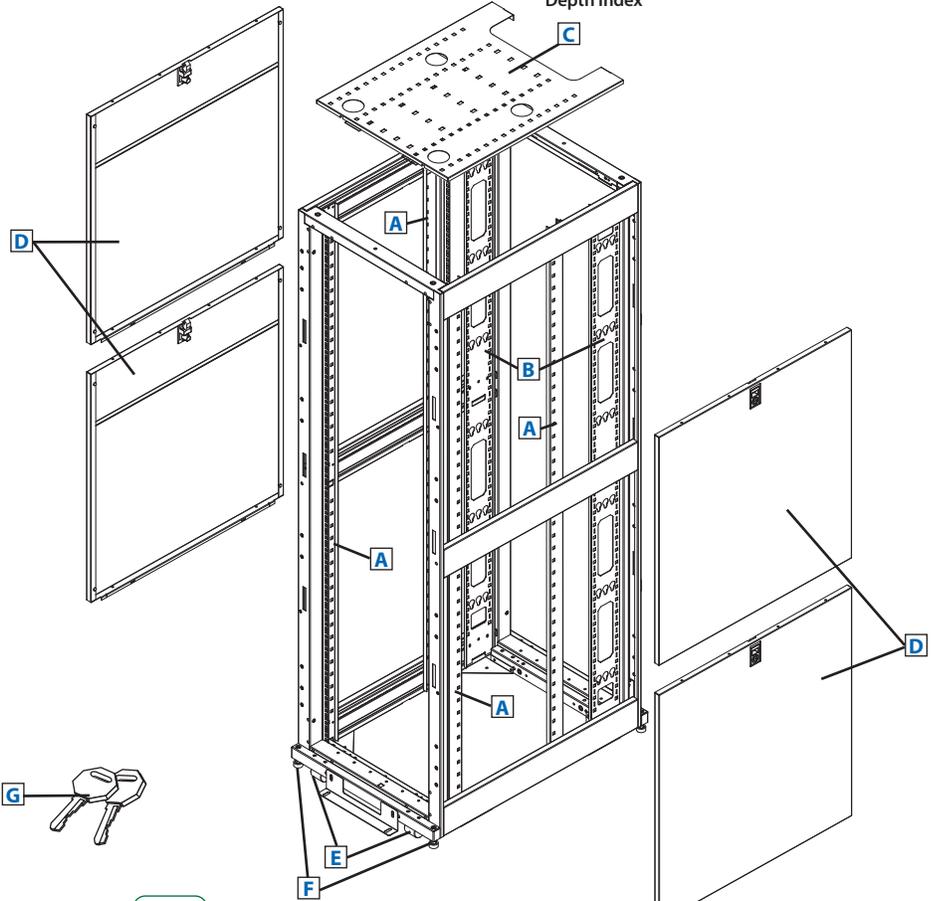

Specifications

Model	SR42UBMDND
Rack Spaces	42U
Stationary Load Capacity	3000 lb. (1361 kg)
Rolling Load Capacity	2250 lb. (1021 kg)
Unit Dimensions (H x W x D)	78.5 x 23.63 x 36 in. (1994 x 600 x 914 mm)
Shipping Dimensions (H x W x D)	85 x 26 x 37.8 in. (2159 x 660 x 960 mm)
Unit Weight	103 lb. (46.7 kg)
Shipping Weight	153 lb. (69.4 kg)
Certifications	EIA-310-E, IEC 60297-3-100, UL 60950, RoHS, NOM
Model	SR42UBMDEXPND (Without side panels.)
Unit Weight	103 lb. (46.7 kg)
Shipping Weight	153 lb. (69.4 kg)

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.



Also Available: Shock pallet models with special packaging to facilitate equipment pre-installation and reshipment to final site. Heavy-duty shock pallet holds up to 1250 lb. (567 kg), including the weight of the enclosure and pre-installed equipment. Add "SP1" to model numbers above to order shock pallet models.

- Enclosures ship fully assembled for rapid deployment, but can be knocked down for easy reassembly in confined spaces
- Modular design optimized for quick configuration and reconfiguration
- Ideal for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

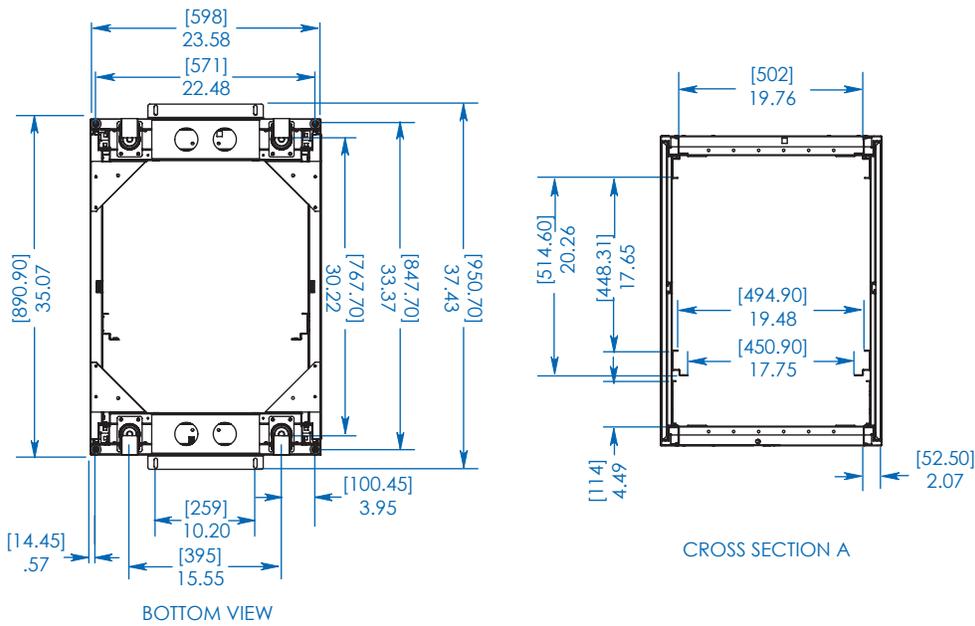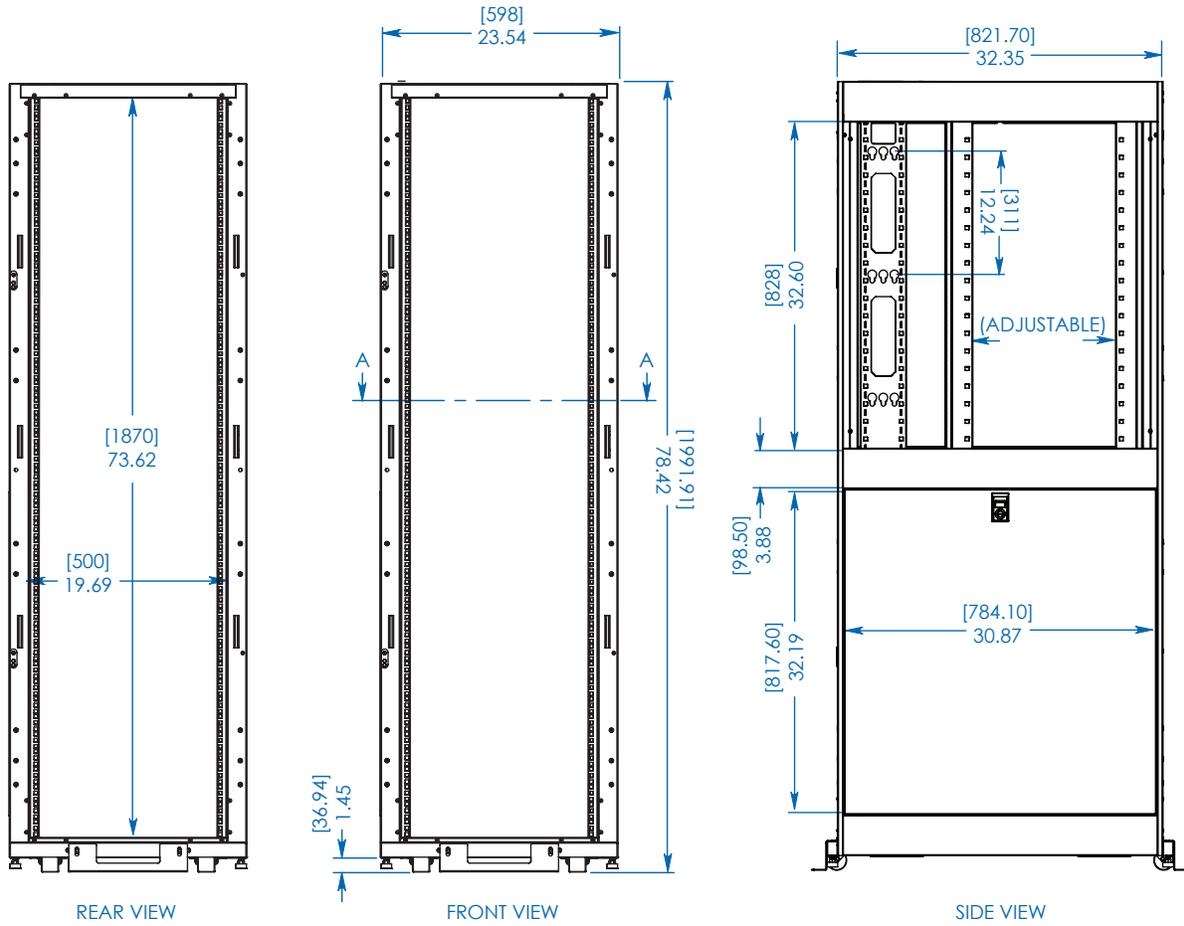


Dimensions: [mm] INCHES


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODELS:
SR42UBMDND
SR42UBMDEXPND




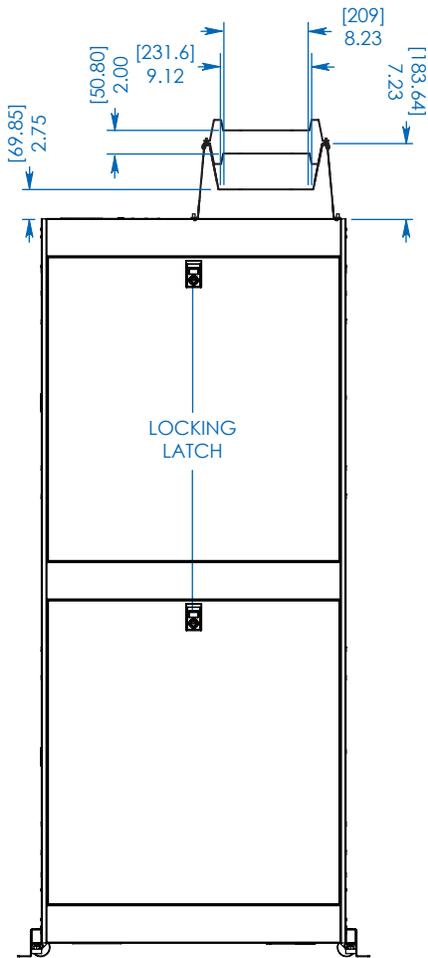

SIDE VIEW

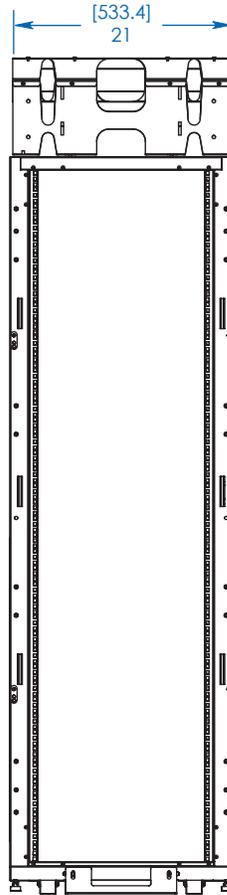


REAR VIEW

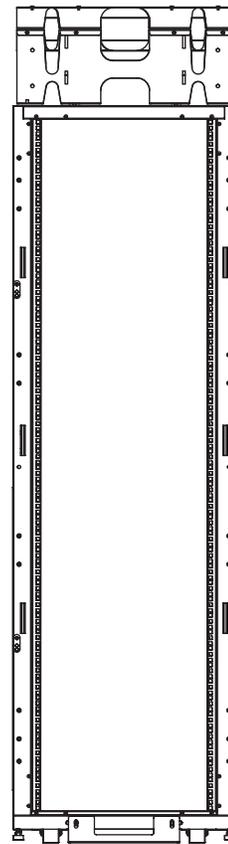

FRONT VIEW

OPTIONAL **SR**CABLETRAY AND **SR**CABLETRAYEXP CABLE MANAGEMENT ACCESSORIES SHOWN (MOUNTING POSITION ADJUSTS TO ACCOMMODATE A WIDE RANGE OF APPLICATIONS)

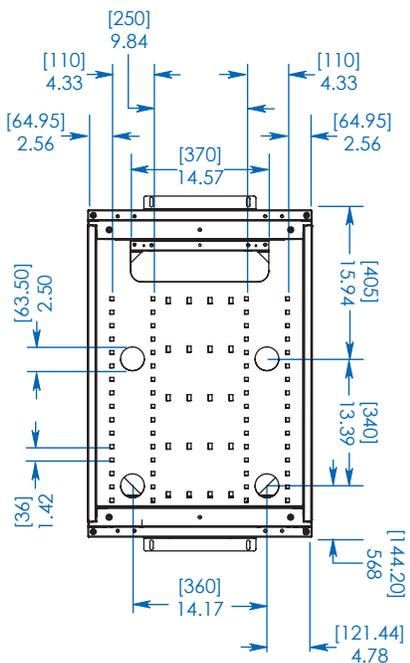

TOP VIEW

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODELS:
SR42UBMDND
SR42UBMDEXPND



1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.triplite.com