

VT-4P65 VT-8P120 VT-16P200 6~18 Port PoE Switches









FEATURES


- Provides 4 10/100Base-TX PoE ports & 2 10/100Base-TX Ethernet Uplink Ports (VT-4P65) / Provides 8 10/100Base-TX PoE ports & 2 10/100Base-TX Uplink Ports (VT-8P120) / Provides 16 10/100Base-TX ports / 1 Gigabit/STP Fiber Combo / 1 Gigabit RJ-45 (VT-16P200)
- PoE Power Budget: 60 Watt (VT-4P65) / 120 Watt (VT-8P120) / 240 Watt (VT-16P200)
- · Conforms to IEEE 802.3/u/ab, 802.3af/at
- High back-plane bandwidth 1Gbps (VT-4P65) / 5.6Gbps (VT-8P120) / 7.2Gbps (VT-16P200)
- IEEE802.3x Flow control
- EMI standards complies with FCC, CE class B

■ Product Layout

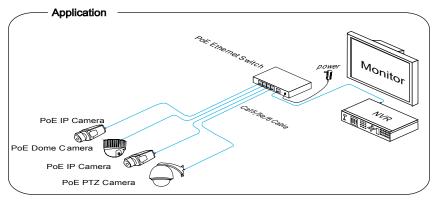




VT-8P120



VT-16P200



Installation

Package Contents:


PoE Ethernet Switch	1pcs
 Power adaptor 	1pcs
Ac power cable	1pcs
 Accessory 	1pcs
User manual	1pcs


Installation Steps:

- 1) Please turn off the PoE Switch & all ethernet devices power before installation to avoid damage,
- 2) Use network cable to connect IP cameras PoE ports
- 3) Use a network cable to connect equipment via up link port and NVR or computer
- 4) Connect power adapter
- 5) Check if the installation is correct and equipment is in good condition and the connection is stable
- 6) Ensure the Ethernet equipment with power is working properly.

Wiring

Tools: Wire Crimper & Network Tester. Wire Sequence of RJ45 plug should conform with EIA/TIA 568A or 568B.





■ Specifications

VT-4P65 Specifications	
Ethernet Speed	4x PoE Ports: 10/100Mbps / 2x Uplink Ports:10/100/Mbps
Ethernet Transmission Distance	328 feet (100 Metres)
Ethernet Standard	IEEE802.3, IEEE 802.3u, IEEE802.3af, IEEE802. 3at
Switching capacity	16
Transfer Rate	14,880 pps @ 10Mbps / 148,800 pps @ 100Mbps
MAC Address	1K MAC address table
Power Supply	External Power Adaptor
Voltage Range	52 VDC
Power Consumption	6W
Working Temperature	32°~104°F (0°~40°C) / 20~85% RH
Dimensions (W x H x D)	6.50" x 4.06" x 1.77" (165 x 103 x 45mm)

VT-8P12O Specifications	
Ethernet Speed	8x PoE Ports: 10/100Mbps / 2x Uplink Ports:10/100Mbps
Ethernet Transmission Distance	328 feet (100 Metres)
Ethernet Standard	IEEE802.3, IEEE 802.3u, IEEE802.3af, IEEE802. 3at
Switching capacity	5.6G
Transfer Rate	14,880 pps @ 10Mbps / 148,800 pps @ 100Mbps
MAC Address	4K MAC address table
Power Supply	External Power Adaptor
Voltage Range	52 ~ 55 VDC
Power Consumption	70W (67W for PoE)
Working Temperature	32°~104°F (0°~40°C) / 20~85% RH
Dimensions (W x H x D)	7.48" x 3.94" x 1.10" (190 x 100 x 28mm)

VT-16P200 Specifications	
Ethernet Speed	16x PoE Ports: 10/100Mbps / G1 (combo) 10/100/1000Mbps & 1.25Gbps / G2 10/100/1000Mbps
Ethernet Transmission Distance	328 feet (100 Metres)
Ethernet Standard	IEEE802.3, IEEE 802.3u, IEEE802.3af, IEEE802. 3at
Switching capacity	7.26
Transfer Rate	14,880 pps @ 10Mbps / 148,800 pps @ 100Mbps / 1,488,000 pps @ 1000Mbps
MAC Address	4K MAC address table
Power Supply	Built-In Power Supply
Voltage Range	100~240 VAC
Power Consumption	190W for 16 PoE
Working Temperature	32°~104°F (0°~40°C) / 20~85% RH
Dimensions (W x H x D)	11.02" x 7.09" x 1.73" (280 x 180 x 44mm)

LIMITED PRODUCT WARRANTY

VITEK products carry a three (3) year limited warranty. VITEK warrants to the purchaser that products manufactured by VITEK are free of any rightful claim of infringement or the like, and when used in the manner intended, will be free of defects in materials and workmanship for a period of three (3) years, or as otherwise stated above, from the date of purchase by the end user. This warranty is nontransferable and extends only to the original buyer or end user customer of a VITEK Authorized Reseller.

The product must have been used only for its intended purpose, and not been subjected to damage by misuse, willful or accidental damage, caused by excessive voltage or lightning.

The product must not have been tampered with in any way or the guarantee will be considered null and void.

This guarantee does not affect your statutory rights.

Contact your local VITEK Reseller should servicing become necessary.

VITEK makes no warranty or guarantee whatsoever with respect to products sold or purchased through unauthorized sales channels. Warranty support is available only if product is purchased through a VITEK Authorized Reseller.

