

VTM-TLM24L / 21L / 19L

Transcendent 24", 21", or 19" LED Professional Security Monitors with HDMI and VGA Inputs, up to 1080p



TRANSCENDENT 24" / 21" / 19" HD LED PROFESSIONAL SECURITY MONITORS WITH HDMI AND VGA INPUTS

The cost-effective VITEK Transcendent "L" Series NDAA Compliant Professional Grade Security Monitors are available with 24", 21", or 19" LED Backlit Displays that are Designed for 24/7 Continuous use in Security Applications with 50,000+ Hour Panel Life, and offer HDMI & VGA Video Inputs along with a 1/8" Stereo Audio Input.

KEY FEATURES

- 24" LED Backlit Display (VTM-TLM24L) / 21" LED Backlit Display (VTM-TLM21L) / 19" LED Backlit Display (VTM-TLM19L)
- Professional Grade Security Monitors Designed for 24/7 Continuous use in Security Applications with 50,000+ Hour Panel Life
- HDMI & VGA Video Inputs / 1/8" Stereo Audio Input
- Resolution up to 1920 x 1080 (1080p) / (VTM-TLM19L: up to 1600 x 900)
- Integrated Stereo Speakers
- 5ms Response Time
- Contrast Ratio of 1000:1
- 178° Horizontal and Vertical Viewing Angle (VTM-TLM19L: 178° / 170°)
- 16:9 Aspect Ratio
- 100mm VESA Standard Mount
- NDAA Compliant
- 3 Year Warranty



24" Professional LED Monitor

VTM-TLM24L



21" Professional LED Monitor

VTM-TLM21L



REAR CONNECTIONS



DC AUDIO VGA HDMI



19" Professional LED Monitor

VTM-TLM19L

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE



VITEK offers a full range of NDAA Compliant IP and HD COAX cameras, recorders and accessories, including wireless access points, monitors, testers and more!

An Eye On Innovation

www.vitekccv.com




VTM-TLM24L / 21L / 19L



SPECIFICATIONS

Panel Type	23.6" / 21.5" / 19.5" LED Backlit Monitor
Resolution	1920 × 1080 (1600 × 900 on VTM-TLM19L)
Aspect Ratio	16:9
Contrast Ratio	1000:1
Brightness	250 cd/m ²
Response Time	5ms
Colors	16.7M
Viewing Angle (H/V)	178° / 178° (VTM-TLM21L, VTM-TLM24L) 178° / 170° (VTM-TLM19L)
Inputs	1 × HDMI, 1 × VGA
Audio	1 × Audio (2 Speakers)
Power consumption	<25W (VTM-TLM24L), <21W (VTM-TLM21L), <18W (VTM-TLM19L)
VESA Mounting	100 × 100mm
NDA Compliance	YES
Other Features	Auto Adjustment, OSD Control
Working Temp	32~104°F (0~40°C)
OSD Language	English, Spanish, French, German, Italian, Dutch, Russian, Chinese
Accessories	Power Cord, Adapter, Stand, User Guide, HDMI Cable
Certificates	FCC-DOC, CE, ROHS
VTM-TLM24L Dimensions	w/ stand: 21.88 × 16.05 × 8.66" (556 × 408 × 220mm), w/out 21.88 × 13.17 × 1.82" (556 × 334 × 46mm)
VTM-TLM19L Dimensions	w/ stand 18.18 × 13.76 × 7.87" (462 × 349 × 200mm), w/out 18.18 × 10.85 × 1.71" (462 × 276 × 44mm)
VTM-TLM21L Dimensions	w/ stand: 19.70 × 15.12 × 7.87" (500 × 384 × 200mm), w/out 19.70 × 11.69 × 1.21" (500 × 297 × 31mm)
Weight: 24L / 21L / 19L	7.94lb / 5.85lb / 5.62lb

DIMENSIONS

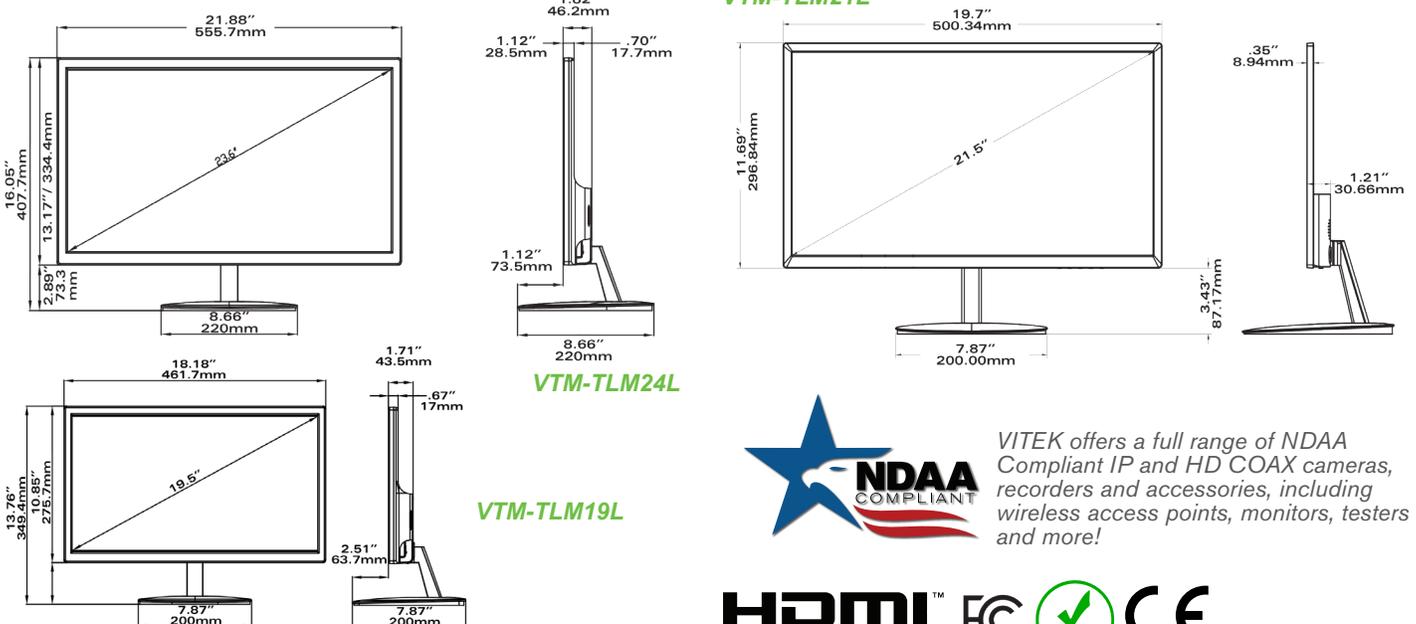

An Eye On Innovation

www.vitekccv.com



VITEK offers a full range of NDA Compliant IP and HD COAX cameras, recorders and accessories, including wireless access points, monitors, testers and more!

