

1 Stauffer Ind. Park - Scranton, Pa. 18517 800-233-4717 Fax: 570-562-0646 www.aifittings.com - E-MAIL : sales @ aifittings.com Manufacturers of Quality Electrical Products

Arlington Industries, Inc. WARNING: TURN OFF POWER AT MAIN PANEL BOX


TVB810 TVB810GC (includes Ground Clip)





Contents:

TV Box For Flat Screen TVs, For Existing Construction

- (1) TVB810 Box
- (1) Mounting Bracket
- (1) CED130 Insert
- (1) 15 Amp Duplex TR Receptacle
- (1) Duplex Cover Plate w/ Screw
- (3) #8-32 x 1/2" Long Screws
- (1) NM94 Cable Connector
- (1) NM900
- (3) Blank Cover Plates
- (6) #6-32 x 1/2" Screws (For Blank Cover Plates)









(For Blank Cover Plates)







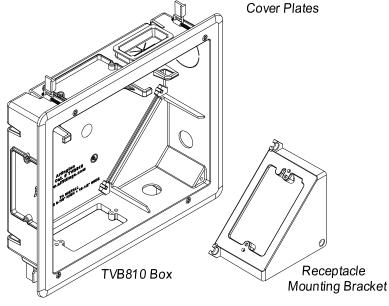



If you have any questions or if parts are missing from your TVB810TV Box For Flat Screen TV Kit, Please call our Customer Service Department at 1-800-233-4717.

Do not call or return this product to your local store or distributor.

Installation Instructions:

- Cut 10-1/2" wide X 9-1/8" high hole in wall in desired location for TVB810 Box.
- Install NM94 Cable Connector in TVB810 Box and pull cable through NM94 Connector.
- Install NM900 in TVB810 Box, to seal unused 1/2" trade size opening.
- If desired, pull low-voltage cable through CED130 or other openings, and mount low-voltage devices as needed.
- Install TVB810 Box into hole in wall, and secure box to wall by tightening (4) Flag screws on box.
- Complete wiring connections and attach electrical receptacle (provided) to Receptacle Mounting Bracket.
- Attach Receptacle Mounting Bracket to TVB810 Box using (3) #8 x 1/2" long screws (provided).
- Complete installation by attaching cover plates (provided) to outlet device.