

# 1506-081 SECONDARY LIGHTED KEYPAD

DoorKing Part Number  
**1506-081**

The 1506-081 secondary keypad is designed to work with the **1504/1506 series keypad entry devices**. When connected to a 1504/1506 keypad, the secondary keypad provides momentary, continuous, and restricted entry codes to be accessed from a **second location**, and is typically installed on the inside of a door or gate area.

**DO NOT** mount the 1506-081 secondary keypad to a moving gate, or immediately next to a gate panel or pedestrian gate. Continuous vibration from slamming gates and vibration can cause damage to the system over time.

**WARNING!** If the keypad is used to activate a vehicular gate operator, it must be mounted a minimum of 6 feet away from the gate and gate operator, or in such a way that the user cannot come into contact with the gate or gate operator while using the device.


## Installation

### 1504/1506 Keypad Entry Device


(Sold Separately)

### Secondary Lighted Keypad

**Note:** The secondary keypad has **NO** relays!  
Valid entry codes entered on the secondary keypad will activate the relays in the 1504/1506 keypad.

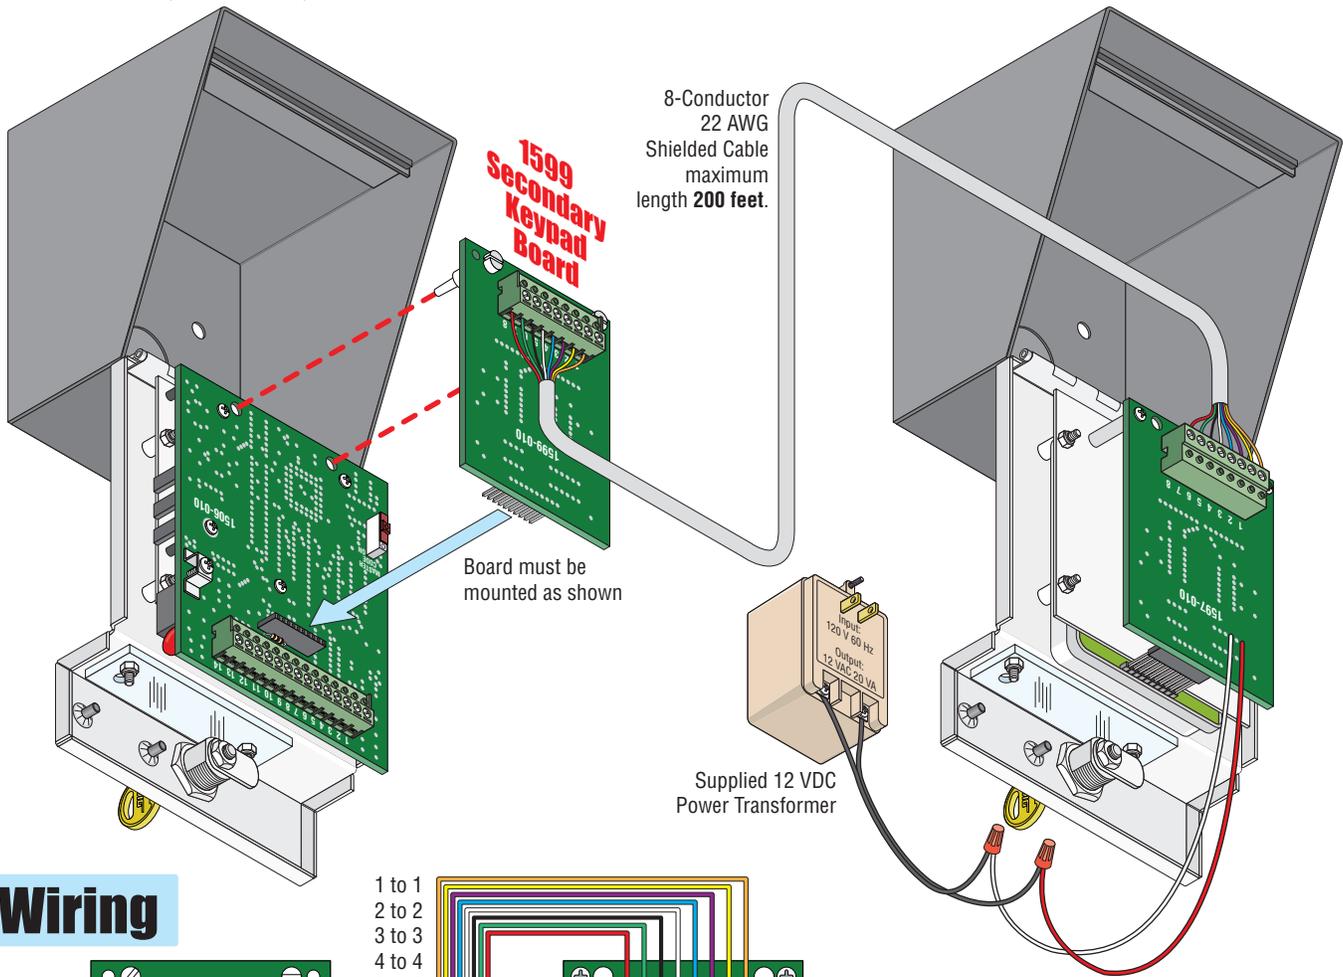

## Wiring

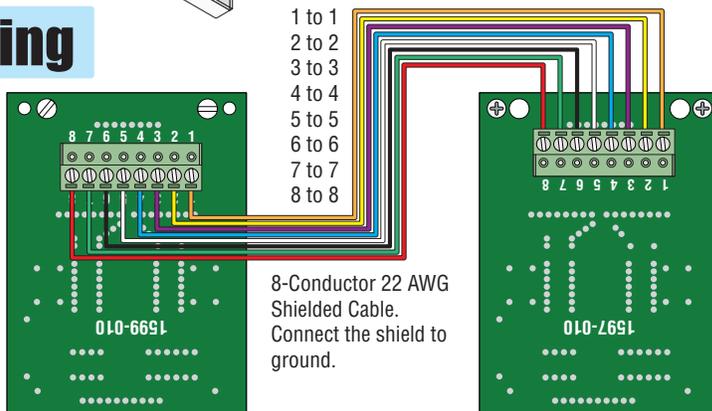

**1599 Secondary Keypad Board**

**Secondary Lighted Keypad**

Wire Size	Max Distance
18 AWG	100 ft
16 AWG	200 ft

Connect Red and White wires to power transformer with supplied wire nuts.  
Polarity does **NOT** matter